



DIAPHRAGM VALVES

Microelectronics Product Line

Catalog 4505/USA
October 2003



DIAPHRAGM VALVES

Microelectronics Product Line

Catalog 4508/USA
October 2003

table of contents

Veriflo Division	1
SM917 1-1/8"	2 - 3
SM930 1-1/8" & 1-1/2"	4 - 7
SM955 1-1/2"	8 - 11
930	12 - 15
930Y	16 - 17
945	18 - 21
945Y	22 - 23
955	24 - 25
955AOPLP	26 - 27
955Y	28 - 29
TITAN II AOP PLUS HP	30 - 31
TITAN II AOP PLUS MP	32 - 33
TITAN II AOP PLUS LP	34 - 35
TITAN II MANUAL PLUS	36 - 37
TITAN II Metal-Seal	38 - 39
928AOPHP	40 - 41
LockOut-TagOut	42 - 43
VAC100	44 - 45
Parker Hannifin Corporation	46



Parker Hannifin Corporation
Veriflo Division
250 Canal Boulevard
Richmond, CA 94804-0034
Telephone 510.235.9590
Fax 510.232.7396
<http://www.veriflo.com>



VERIFLO DIVISION



Veriflo Division, Parker Hannifin Corporation is a leading manufacturer of precision valves, regulators and surface mount components for the control and application of liquids and gases used in the fabrication of semiconductors, as well as in the chemical and petrochemical industries.

A Leading Manufacturer Of Precision Valves, Regulators & Surface Mount Components

Veriflo has maintained industry leadership over the past 95 years through innovative engineering, manufacturing and by placing a premium on quality customer care.



The division maintains two state-of-the-art Class 10 Clean Rooms at its Richmond, CA, facility and has adopted a corporate wide "Lean Manufacturing" philosophy, which is delivering greater value to the customer by eliminating wasteful steps through continuous improvement activities.

Veriflo Division's two manufacturing facilities develop and manufacture applications for the Semiconductor/High Purity and Instrument/Analyzer industries.

With the focus of maintaining the highest industry standards,



Maintained Industry Leadership By Placing A Premium On Quality Customer Care

Veriflo Division has achieved an ISO 9001 registration at both its Richmond, CA manufacturing plant and at its Carson City, NV facility. This certification confirms Veriflo's commitment to quality and excellence as recognized by the international community.

The Instrumentation Group of Parker Hannifin specializes in high quality, critical flow components for world-wide process instrumentation, ultra-high-purity, medical, analytical and biopharmaceutical applications.

Parker's Instrumentation Group has ten manufacturing plants and over 300 authorized distributor locations around the world to provide local inventory and technical support. Key markets for the Instrumentation Group include: Chemical Process, Power Generation, Oil and Gas Exploration, Semiconductor Manufacturing, Biomedical, and Analytical Equipment.

Note: For further information on Veriflo Division and or its product line visit the division web site at www.veriflo.com. For more information on Parker Hannifin Corporation visit the corporation's web site at www.parker.com.

SM917 1-1/8"

Ultra High Purity Diaphragm Valve



Parker Hannifin Corporation's Veriflo Division presents the Surface Mount 917 1-1/8" Ultra High Purity Diaphragm Valves providing exceptional performance for today's modular surface mount systems.



features

- ▶ 0.17 C_v for AOP style or 0.15 C_v for 1/4 turn manual style valves.
- ▶ "VeriClean", Veriflo's low sulfur high purity 316L Stainless Steel™, which enhances electropolishing, and corrosion resistance.
- ▶ Standard surface finish 5 micro inch Ra (.13 micro meter).
- ▶ Internally threadless and springless.
- ▶ Fully functional for pressure ranges from vacuum to 125 psig for Air Operated valves and 250 psig for manual valves.
- ▶ Change from air operated actuator to lever or visa versa without intruding into wetted area.
- ▶ 100% Helium leak tested.

materials of construction

Wetted

Body "VeriClean", Veriflo's custom high purity type 316L Stainless Steel™
Seat PCTFE, Optional Vespel® or PEEK™
Diaphragm Elgiloy® or equivalent

Non-wetted

Nut Stainless Steel

operating conditions

Maximum operating pressure:

AOP 125 psig (8.6 barg)
Manual 250 psig (17.2 barg)

Minimum operating pressure Vacuum

AOP Actuation 75 psig (5 barg) nominal
Temperature -40°F to 150°F (-40°C to 66°C)
Bake out 250°F (121°C) in the open position

functional performance

Flow capacity:

AOP $C_v = .17$
1/4 Turn manual $C_v = .15$
(SEMI Flow Coefficient Test# F-32-0998)

Design Leak Rate:

Outboard 4×10^9 scc/sec He
Inboard 2×10^{10} scc/sec He
Across seat 1×10^9 scc/sec He

Design Proof Pressure:

AOP 188 psig (13 barg)
1/4 Turn Manual 375 psig (26 barg)

Design Burst Pressure:

AOP 375 psig (26 barg)
1/4 Turn Manual 750 psig (52 barg)

standard connections

SEMI Modular Interface

surface finishes

Standard Ra 5 micro inch
(.13 micro meter) or less


approximate weight

.7 lbs. (.32 kg)




SM917 1-1/8"

Dimensional Drawings

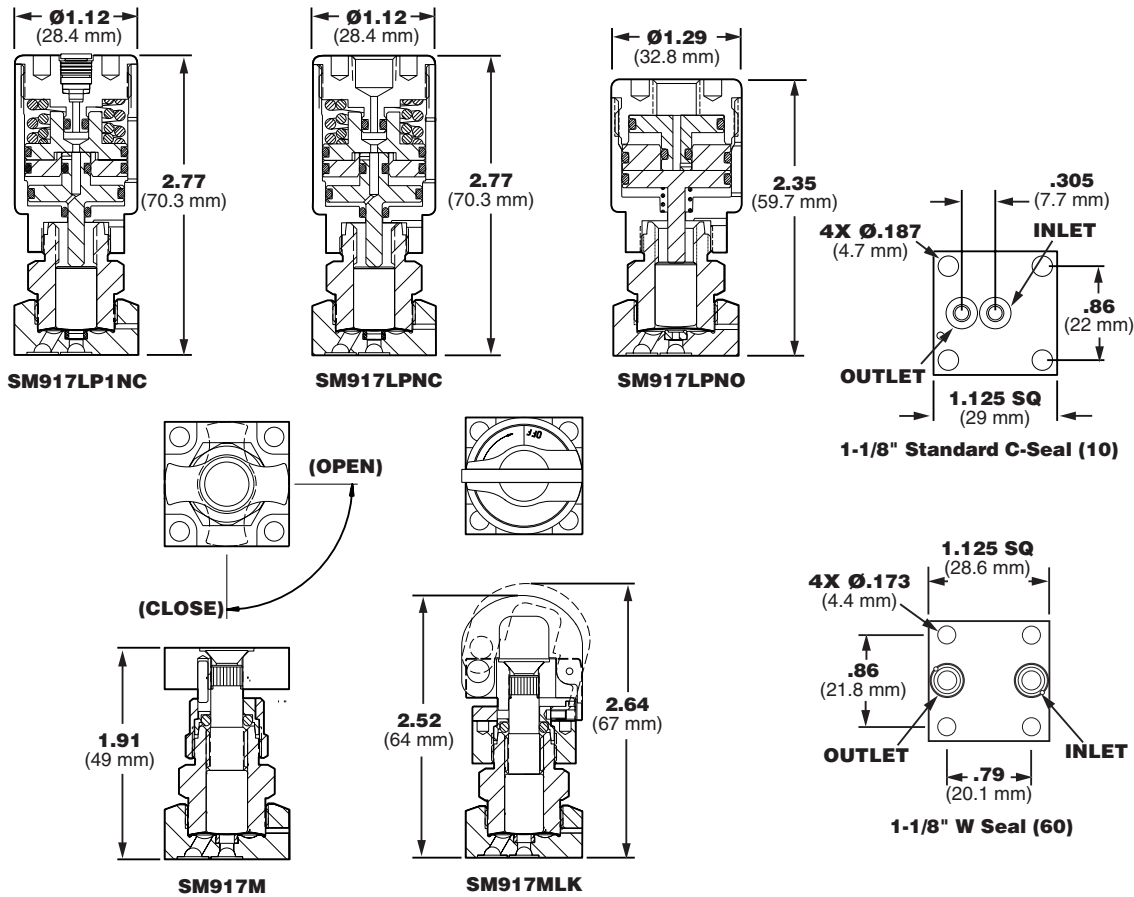

* Standard Mini-Lever Is Blue


Ordering Information

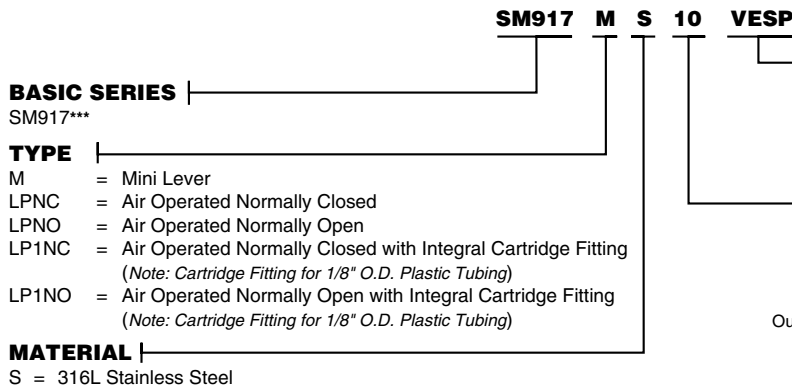

OPTIONAL FEATURES

LK = LockOut-TagOut*
 VESP = Vespe[®] Seat**
 PEEK = PEEK[™] Seat
 (Note: Consult Factory For Additional Handle Colors)

PORTING

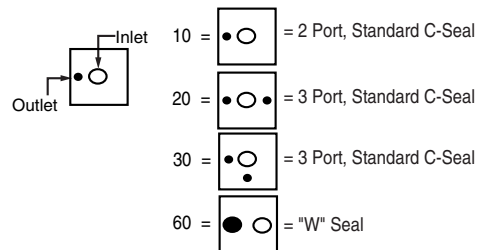

* LK Includes LOTO Lever for Mini Lever type Valve.

** Recommended for Nitrous Oxide (N₂O) Service.

*** Only available with 1-1/8" body size

Vespe[®] is a registered trademark of DuPont Company.
 Elgiloy[®] is a registered trademark of Elgiloy Company.
 PEEK[™] is a trademark of Victrex plc.

SM930 1-1/8" & 1-1/2"

UHP Diaphragm Valve



Parker Hannifin Corporation's Veriflo Division presents the Surface Mount 930 Air Operated and Manual Diaphragm Valve. The SM930 diaphragm valve provides exceptional performance for today's modular surface mount systems.



features

- ▶ Meets SEMI modular interface.
- ▶ "VeriClean", Veriflo's low sulfur high purity 316L Stainless Steel™, which enhances electropolishing, and corrosion resistance.
- ▶ Standard surface finish 5 micro inch Ra (.13 micro meter).
- ▶ Internally threadless and springless.
- ▶ Fully field serviceable seat (special tool required).
- ▶ Fully functional for pressure ranges from vacuum to 125 psig for Air Operated valves and 250 psig for manual valves.
- ▶ Change from air operated actuator to lever or visa versa without intruding into wetted area.
- ▶ 100% Helium leak tested.

materials of construction

Wetted

Body "VeriClean", Veriflo's custom high purity type 316L Stainless Steel™
 Seat PCTFE, optional Vespel® or PEEK™
 Diaphragm Elgiloy® or equivalent

Non-wetted

Nut Stainless Steel
 Cap Stainless Steel

operating conditions

Maximum operating pressure:
 AOP 125 psig (8.6 barg)
 Manual 250 psig (17 barg)
 Minimum operating pressure Vacuum
 AOP Actuation 75 psig (5 barg) nominal
 Temperature -40°F to 150°F (-40°C to 66°C)
 Bake out 250°F (121°C) in the open position

functional performance

Flow capacity:
 Standard Seal
 AOP $C_v = .25$
 1/4 Turn manual $C_v = .20$
 (SEMI Flow Coefficient Test# F-32-0998)

Design Leak Rate:
 Outboard 1×10^9 scc/sec He
 Inboard 2×10^{10} scc/sec He
 Across seat 1×10^9 scc/sec He

Design Proof Pressure:
 AOP 188 psig (13 barg)
 1/4 Turn Manual 375 psig (26 barg)

Design Burst Pressure:
 AOP 375 psig (26 barg)
 1/4 Turn Manual 750 psig (52 barg)

standard connections

SEMI Modular Interface




surface finishes

Standard Ra 5 micro inch (.13 micro meter) or less




SM930 1-1/8" & 1-1/2"



Dimensional Drawings 1-1/2"

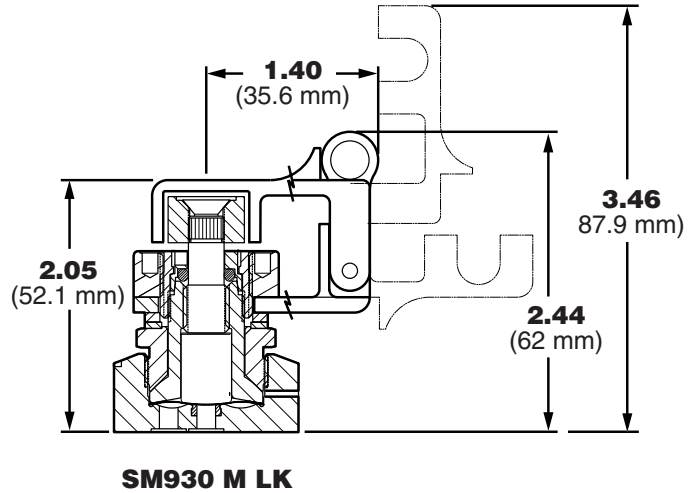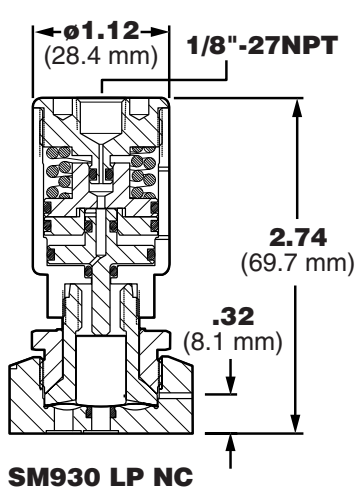

Standard Mini-Lever Color Is Blue




Standard Indicating Knob Color Is Black

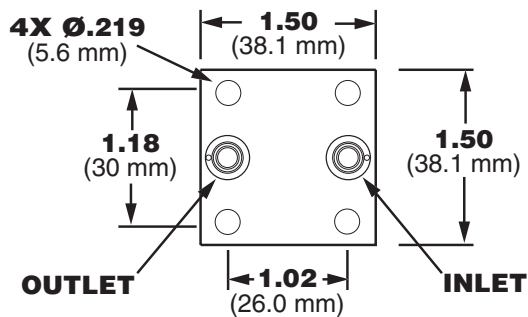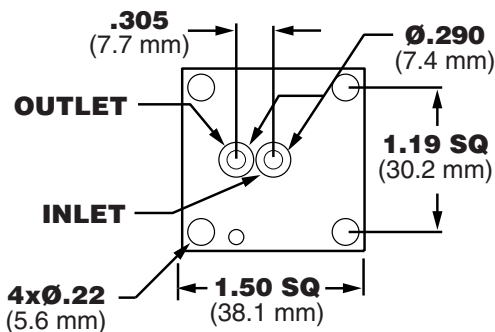


SM930 1-1/8" & 1-1/2"

Dimensional Drawings 1-1/8"

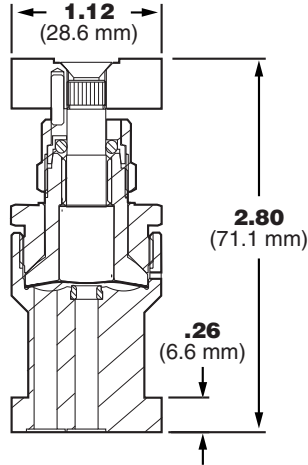


SM930M_2

Standard Mini-Lever Color Is Blue

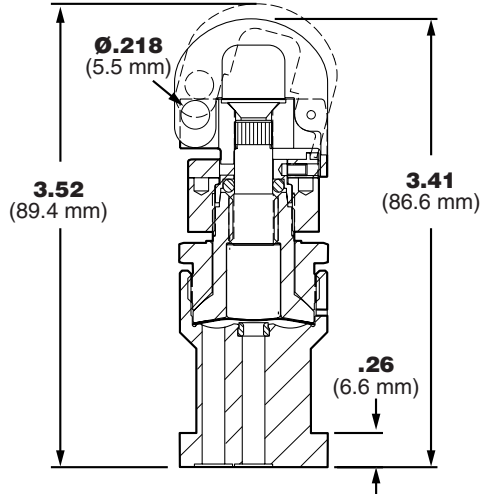


SM930M_2LK

Standard Loto-Mini-Lever Color Is Red

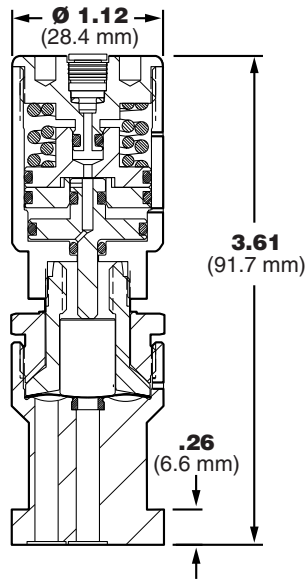


SM930LP1NC_2


New Integral Cartridge Fitting Connects To 1/8" O.D. Plastic Tubing

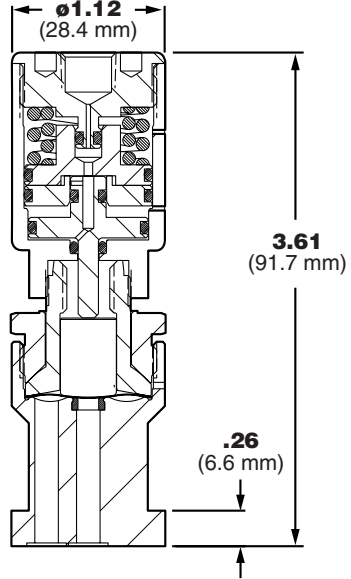

SM930LPNC_2

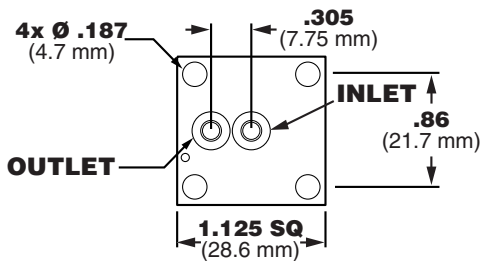


1-1/8" Standard C-Seal (10)

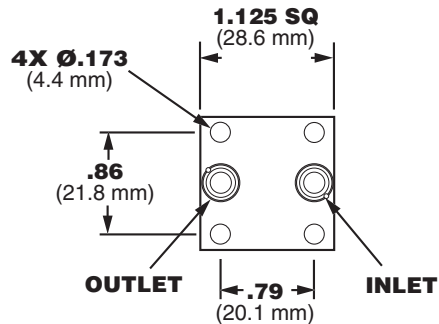

1-1/8" W-Seal (60)

SM930 1-1/8" & 1-1/2"

Ordering Information

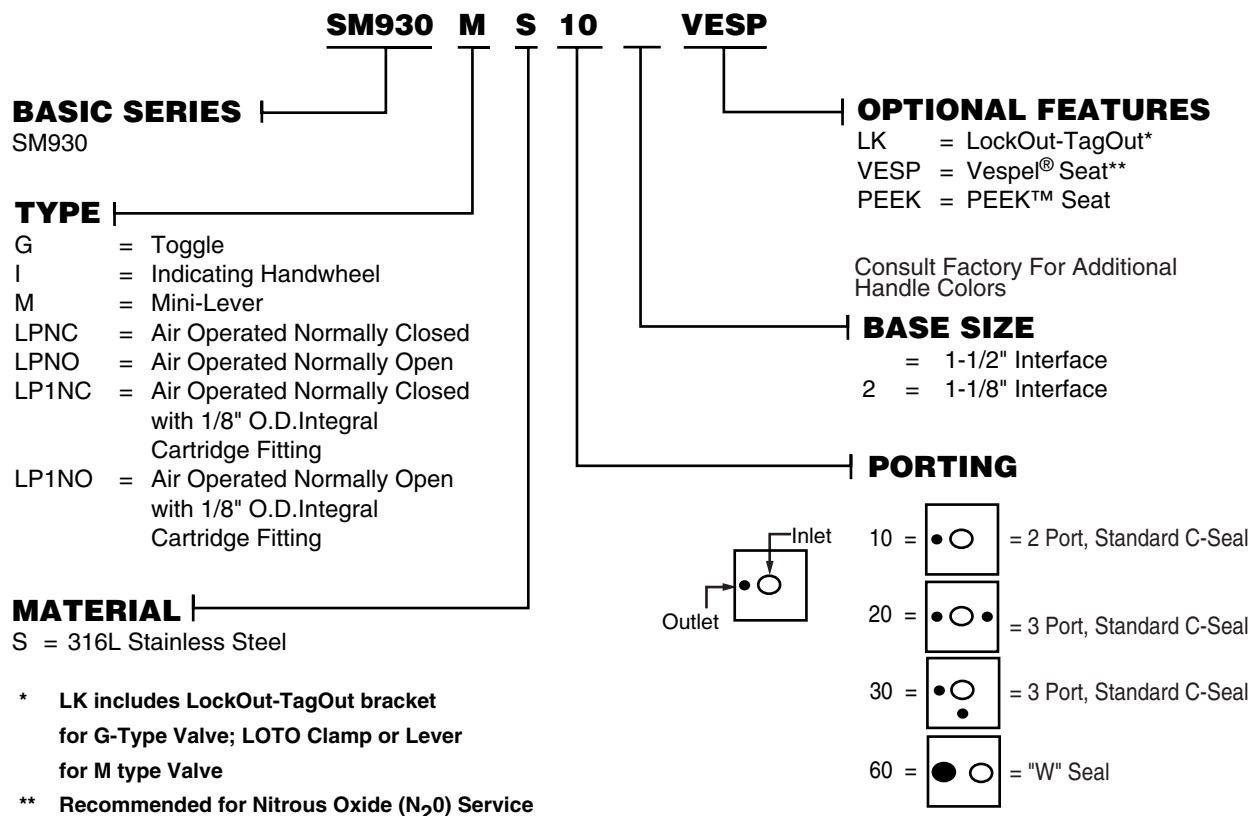

Elgiloy® is a registered trademark of Elgiloy Company.
 Vespel® is a registered trademark of DuPont.
 PEEK™ is a trademark of Victrex plc.

SM955 Valve 1-1/2"

High Flow
Diaphragm Valve



Parker Hannifin Corporation's Veriflo Division presents the Surface Mount 955 Air Operated and Manual Diaphragm Valve. The SM955 provides exceptional performance for today's modular surface mount systems that have high flow requirements.



features

- ▶ Meets SEMI Modular Interface.
- ▶ Standard Seal: 0.30 C_V for AOP style, 0.25 C_V for 1/4 turn manual style. High Flow Seal: 0.50 C_V for AOP style, 0.35 C_V for 1/4 turn style valves.
- ▶ "VeriClean" low sulfur high purity 316L VAR Stainless Steel™, which enhances electropolishing, and corrosion resistance.
- ▶ Standard surface finish 5 micro inch Ra (.13 micro meter).
- ▶ Internally threadless and springless.
- ▶ Fully field serviceable seat (special tool required).
- ▶ Fully functional for pressure ranges from vacuum to 125 psig for Air Operated valves and 250 psig for manual valves.
- ▶ Change from air operated actuator to lever or visa versa without intruding into wetted area.
- ▶ 100% Helium leak tested.

materials of construction

Wetted

Body "VeriClean", Veriflo's custom high purity Type 316L VAR Stainless Steel™
Seat PCTFE, optional Vespel®, or PEEK™
Diaphragm Elgiloy® or equivalent

Non-Wetted

Nut 316L Stainless Steel
Cap 316L Stainless Steel

operating conditions

Maximum operating pressure:
AOP 125 psig (8.6 barg)
Manual 250 psig (17 barg)

Minimum operating pressure Vacuum
AOP Actuation 75 psig (5 barg) nominal
Temperature -40°F to 150°F (-40°C to 66°C)
Bake out 250°F (121°C) in the open position

functional performance

Flow capacity:
Standard Seal
AOP $C_V = .30$
1/4 Turn Manual $C_V = .25$

High Flow Seal
AOP $C_V = .50$
1/4 Turn Manual $C_V = .35$
(SEMI Flow Coefficient Test# F-32-0998)

Design Leak Rate:
Outboard 1×10^{-9} scc/sec He
Inboard 2×10^{-10} scc/sec He
Across seat 4×10^{-9} scc/sec He

Design Proof Pressure:
AOP 188 psig (13 barg)
1/4 Turn Manual 375 psig (26 barg)

Design Burst Pressure:
AOP 375 psig (26 barg)
1/4 Turn Manual 750 psig (52 barg)

standard connections

SEMI modular interface

internal volume

.70 cc

surface finishes

Standard Ra 5 micro inch
(.13 micro meter) or less




approximate weight

.70 lbs (.32 kg)




SM955 Valve 1-1/2"



Dimensional Drawings

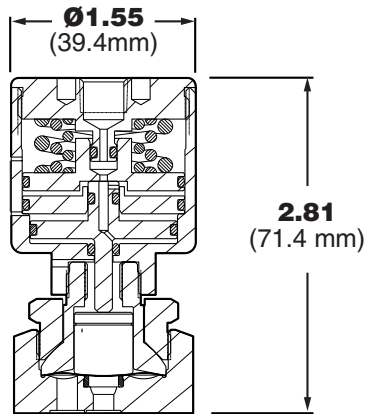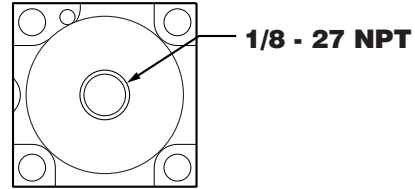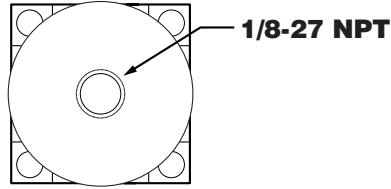



SM955 LP NC

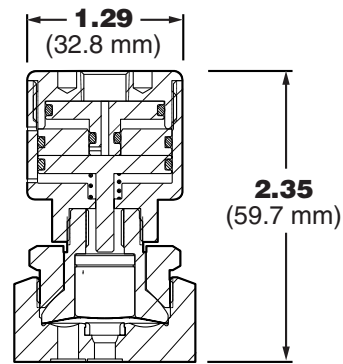

SM955 LP NO

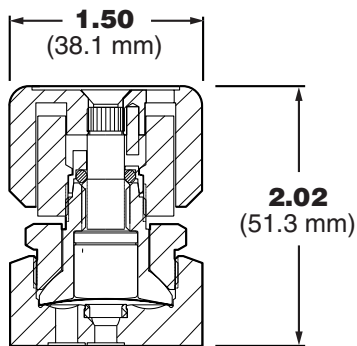




SM955 I

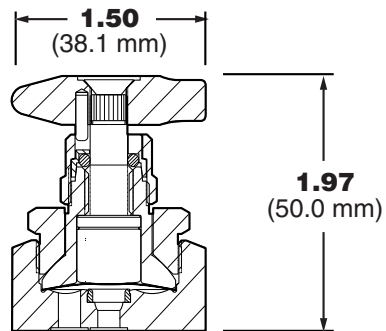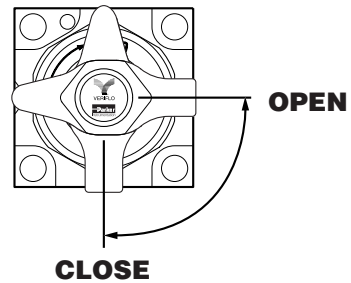


SM955 M

SM955 Valve 1-1/2"


Dimensional Drawings

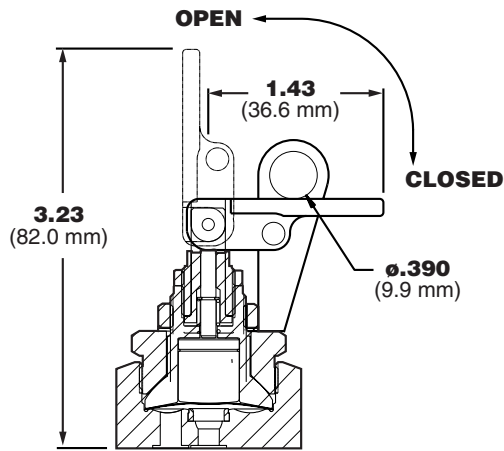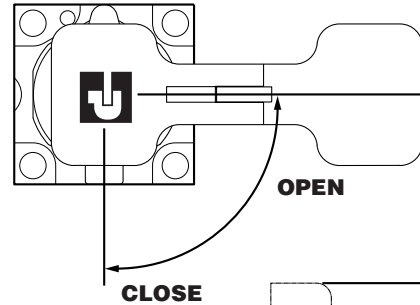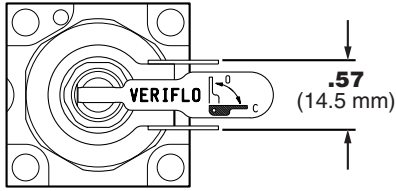


SM955 G LK

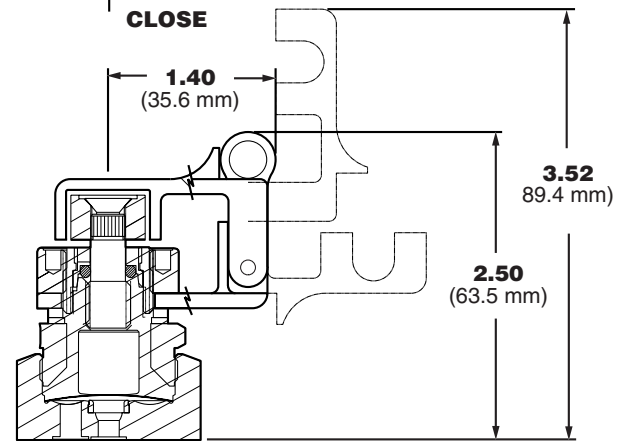


SM955 M LK

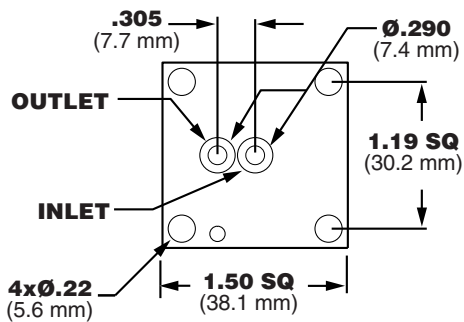

1-1/2" Standard C-Seal (10)

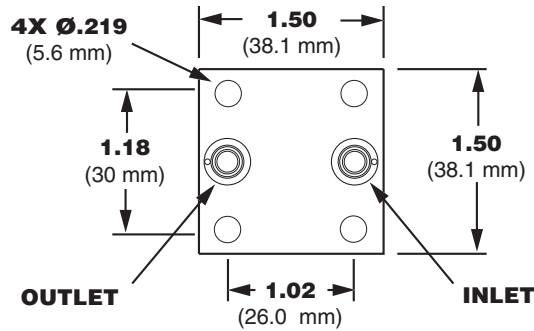


1-1/2" W Seal (60)

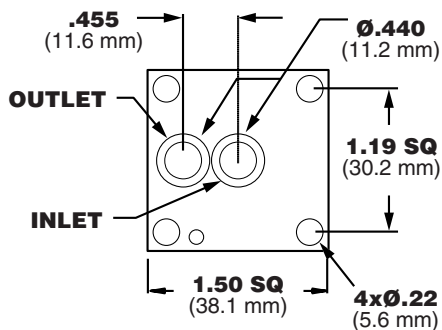

1-1/2" High Flow C-Seal (11)

SM955 Valve 1-1/2"

Ordering Information

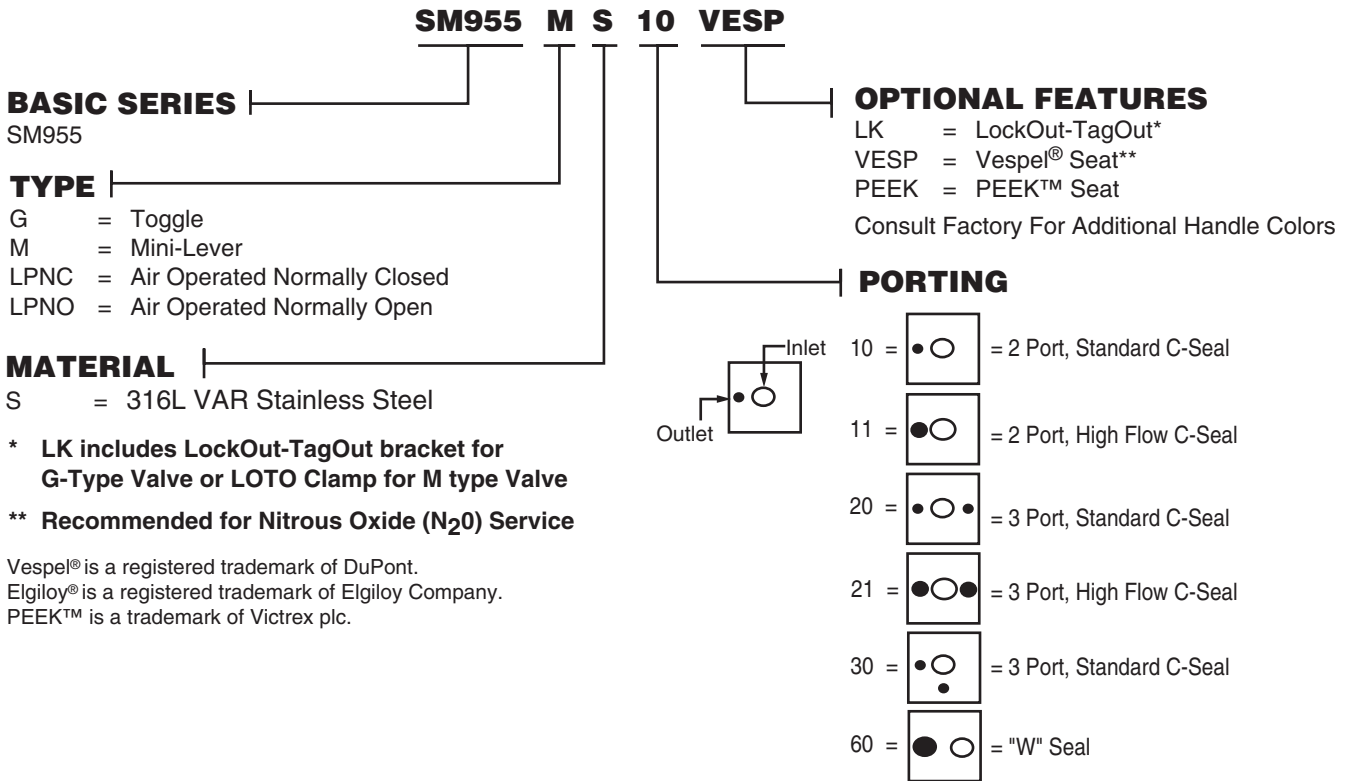

QUANTUM 930 Valve



Parker Hannifin Corporation's Veriflo Division presents the 930 valve for use in ultra high purity applications.



features

- ▶ "VeriClean", Veriflo's low sulfur high purity 316L VAR Stainless Steel™, which enhances electropolishing, welding and corrosion resistance.
- ▶ Standard surface finish 5 micro inch Ra (.13 micro meter).
- ▶ Internally threadless and springless.
- ▶ Fully functional from vacuum to 125 psig (for Air Operated Actuator), 250 psig for manual versions.
- ▶ Aerodynamic, fully swept flow passages.
- ▶ Minimum particle generation and particle entrapment areas.
- ▶ Change from air operated actuator to lever or visa versa without intruding into wetted area.
- ▶ 100% Helium leak tested.
- ▶ Maintains key dimensions of Veriflo's 944 and 945 valves.



materials of construction

Wetted

Body . . . "VeriClean", Veriflo's custom high purity type 316L VAR Stainless Steel™, Hastelloy C-22®
 Seat PCTFE, optional Vespel®
 Diaphragm Elgiloy® or equivalent

Non-wetted

Nut 316L Stainless Steel
 Cap 316L Stainless Steel

operating conditions

Maximum operating pressure:
 AOP 125 psig (8.6 barg)
 Manual 250 psig (17 barg)
 Minimum operating pressure Vacuum
 AOP Actuation 75 psig (5 barg) nominal
 Temperature 0°F to 150°F (-18°C to 66°C)
 Bake out 250°F (121°C) in the open position

functional performance

Flow capacity:
 AOP $C_V = .3$
 Lever $C_V = .22$

Design Leak Rate:
 Outboard less than 1×10^{-9} scc/sec He
 Inboard less than 2×10^{-10} scc/sec He
 Across seat less than 1×10^{-9} scc/sec He

Design Proof Pressure:
 AOP 188 psig (13 barg)
 Manual 375 psig (26 barg)

Design Burst Pressure:
 AOP 375 psig (26 barg)
 Manual 750 psig (52 barg)

standard configuration

Any configuration of FS male and/or female fittings.
 1/4" gland to gland length $2.78 \pm .02$ in.
 (70.6 ± .05 mm)
 Optional $3.06 \pm .02$ in. ($77.7 \pm .05$ mm)
 1/2" gland to gland length $4.14 \pm .02$ in.
 (105.2 mm)
 1/4" tube stubs inlet and outlet
 End to end length . . . $1.75 \pm .02$ in. ($44.5 \pm .05$ mm)
 Optional $1.61 \pm .02$ in. ($40.7 \pm .05$ mm)
 3/8" & 1/2" tube stubs inlet and outlet

End to end length . . . $2.24 \pm .02$ in. ($56.9 \pm .05$ mm)
 Other configurations available including as many as five ports.

See Valve Selection Guide.

internal volume

2.64 cc (including face seal fittings)

surface finish

Standard Ra 5 micro inch
 (.13 micro meter) or less


approximate weight

1.75 lbs. (.80 kg)


QUANTUM 930 Valve

Dimensional Drawings


930 AOP LP NC

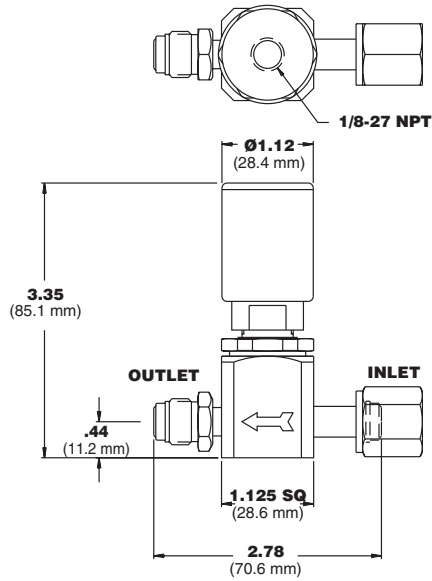





930 AOP LP NO

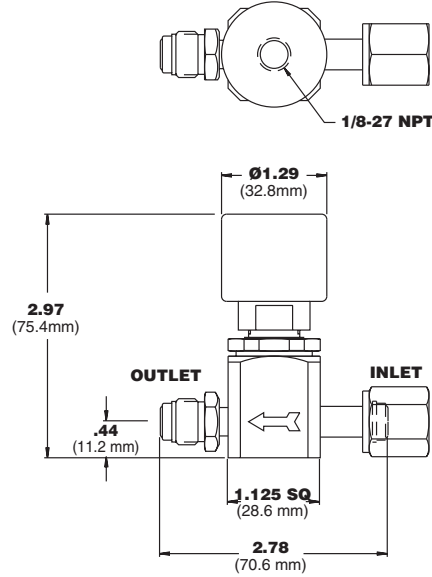

930 L FS8

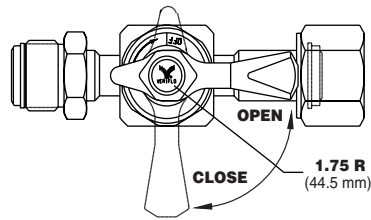

930 L TS8

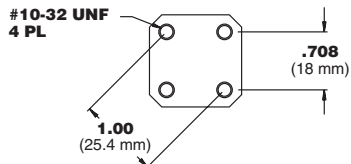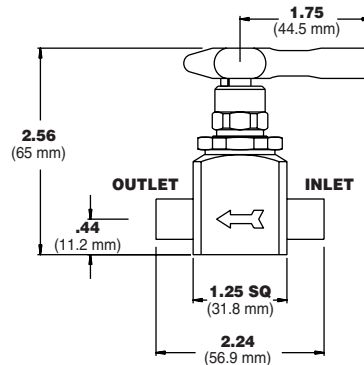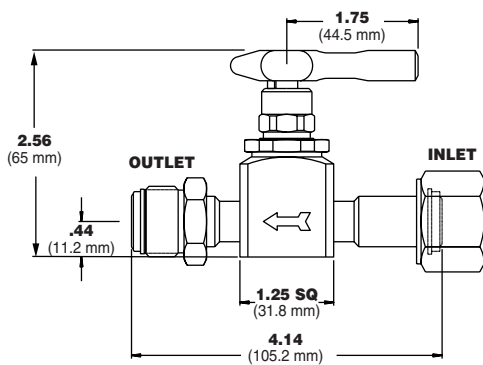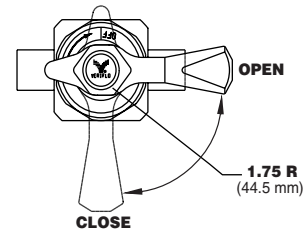


Standard Mounting Hole Pattern


QUANTUM 930 Valve

Dimensional Drawings


930 M

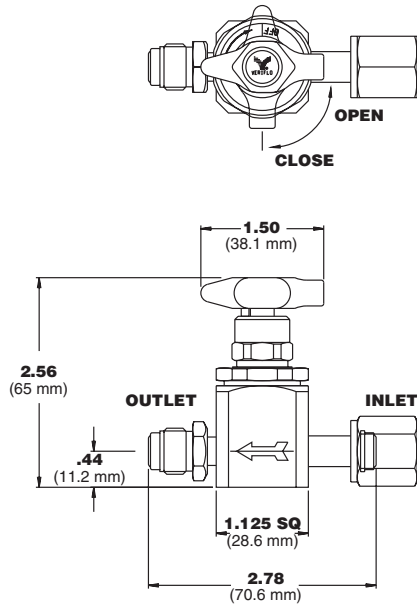


930 I

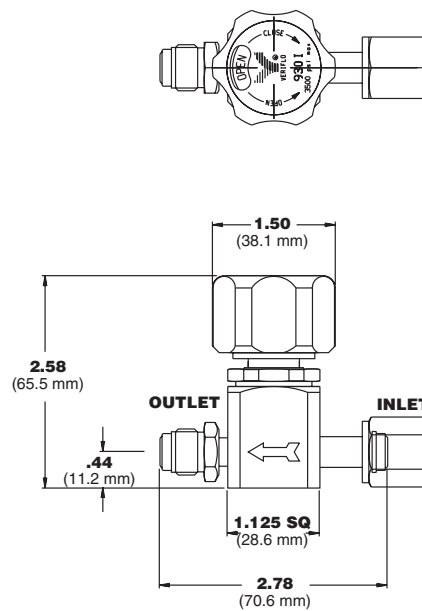

930 G LK BRACKET

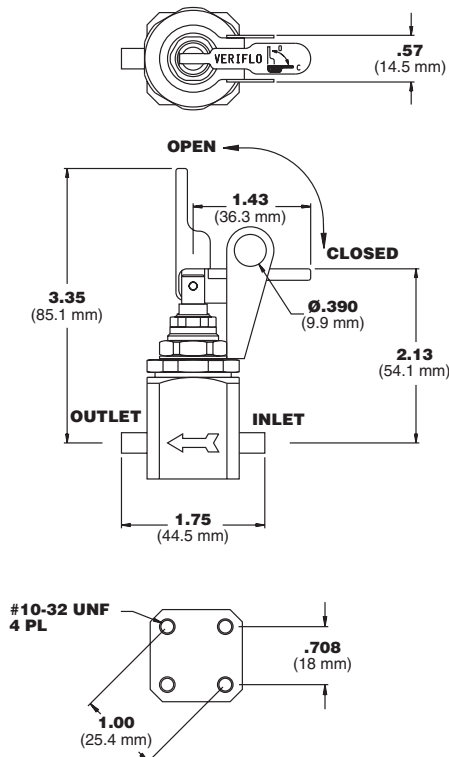

930 M LK CLAMP

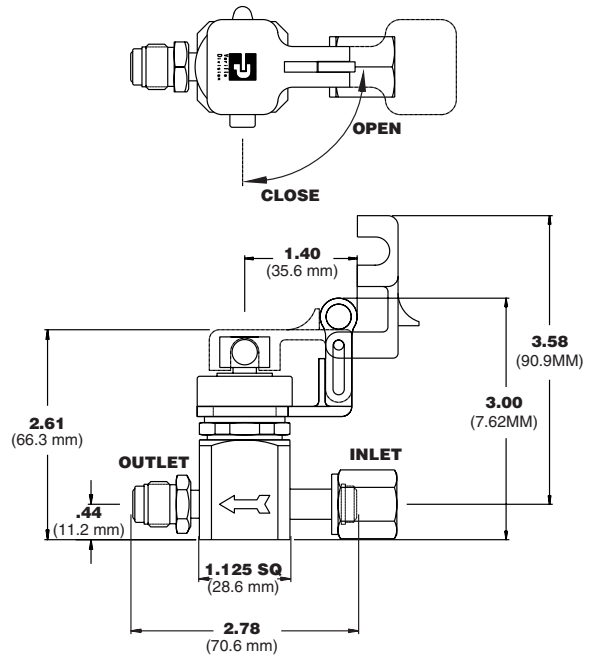


Standard Mounting Hole Pattern

QUANTUM 930 Valve

Flow Curve

.3 C_v Actuator Types

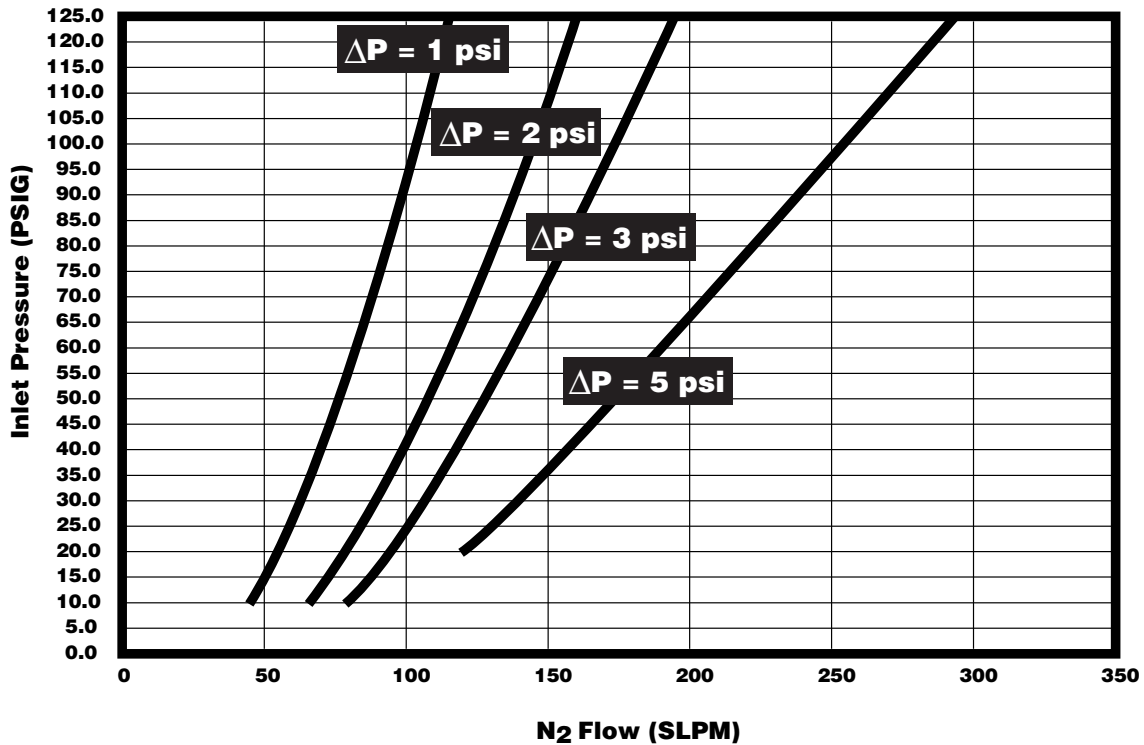

Ordering Information

930 AOPLPNC S FSFM VESP

BASIC SERIES

930

TYPE

- AOPLPNC = Air Operated, Low Pressure, Normally Closed
- AOPLPNO = Air Operated, Low Pressure, Normally Open
- G = Toggle
- I = Indicating Handwheel
- L = Lever
- M = Mini Lever
- S = Spin Handwheel

MATERIAL

- S = 316L VAR Stainless Steel
- H = Hastelloy C-22®

* 1/2" Connections use larger size body, please see dimensional drawings

** LockOut-TagOut Clamp for M Type Valves
LockOut-TagOut Bracket for G Type Valves

*** Not available on I and AOP versions

Hastelloy C-22® is a registered trademark of Haynes International, Inc.

Kel-F 81® is a registered trademark of 3M Company.

Vespe® is a registered trademark of DuPont Company.

Elgiloy® is a registered trademark of Elgiloy Company.

OPTIONAL FEATURES

- VESP = Vespe® Seat (For N₂O use)
- LK = LockOut-TagOut **
- PM = Panel Mount ***
- 2.3 = 1/4" Fixed Male Face Seal (2 Port Only)

CONNECTIONS

- FSMM = 1/4" Face Seal, Male in-Male out
- FSFF = 1/4" Face Seal, Female in-Female out
- FSFM = 1/4" Face Seal, Female in-Male out
- FSMF = 1/4" Face Seal, Male in-Female out
- FS8MM* = 1/2" Face Seal, Male in-Male out
- FS8FF* = 1/2" Face Seal, Female in-Female out
- FS8FM* = 1/2" Face Seal, Female in-Male out
- FS8MF* = 1/2" Face Seal, Male in-Female out
- TS = 1/4" Tube Stub
- TS6 = 3/8" Tube Stub
- TS8* = 1/2" Tube Stub


QUANTUM 930Y

High Purity Manifold Valve



Parker Hannifin Corporation's Veriflo Division presents the 930Y, a diaphragm valve engineered to meet the specific requirements of semiconductor OEM tool manufacturers.

The 930Y is a sophisticated design with Veriflo's proven ultra high purity, low internal volume components. Space savings and fewer welds make the 930Y ideal for process control and purge systems.

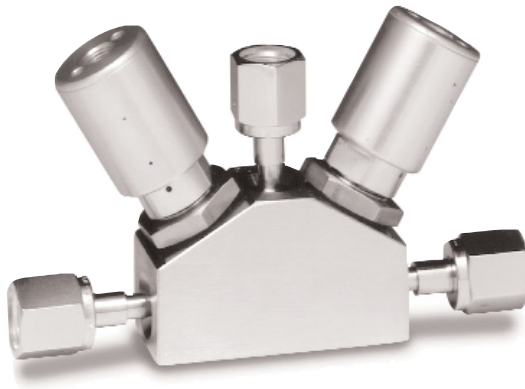

features

- ▶ High cycle life.
- ▶ Ideal for valve manifold boxes (VMB).
- ▶ Ultra high performance.
- ▶ Internally threadless and springless.
- ▶ NO (normally open), NC (normally closed), or manual actuators available.
- ▶ Fully functional under vacuum conditions.

materials of construction

Wetted

Body "VeriClean", Veriflo's custom high purity Type 316L Stainless Steel™
Seat PCTFE (optional VespeI®, PEEK™)
Diaphragm Elgiloy® or equivalent

Non-wetted

Nut 316L Stainless Steel
Cap 316L Stainless Steel

Actuator material

Body Anodized Aluminum
Pistons Brass
O-ring seals Viton®

operating conditions

Maximum operating pressure:

AOP 125 psig (8.6 barg)
Manual 250 psig (17 barg)

Minimum operating pressure Vacuum
AOP Actuation 75 psig (5 barg) nominal
Temperature 0°F to 150°F (-18°C to 66°C)
Bake out 250°F (121°C) in the open position

functional performance

Flow capacity:

AOP $C_V = .3$
Lever $C_V = .22$
(SEMI Flow Coefficient Test #F-32-0998)

Design Leak Rate:

Outboard less than 1×10^9 scc/sec He
Inboard less than 2×10^{10} scc/sec He
Across seat less than 1×10^9 scc/sec He

Design Proof Pressure:

AOP 188 psig (13 barg)
Manual 375 psig (26 barg)

Design Burst Pressure:

AOP 375 psig (26 barg)
Manual 750 psig (52 barg)

surface finishes

Standard Ra 10 micro inch
(.25 micro meter) or less
Optional Ra EV = 5 micro inch
(.13 micro meter) or less

standard connections

Any combination of FS male and / or female fittings:

1/4" Gland to gland length 4.69 or 4.06
(see dimensional drawing)

1/4" tube stubs inlet and outlet available:

End to end length 3.62

internal volume

4.26 cc


approximate weight

2.1 lbs (0.95 kgs)





QUANTUM 930Y


Dimensional Drawings

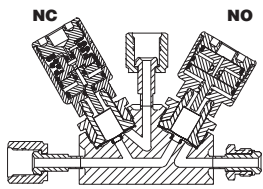


930Y1NO/NCFSMFFA

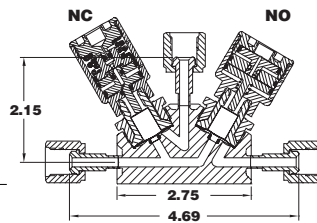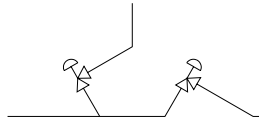



930Y1NO/NCFSFFA




930Y1NO/NCFSFFB

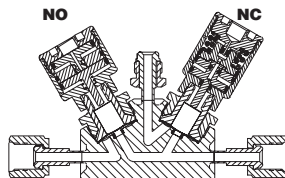


930Y2NC/NOFSMFFA

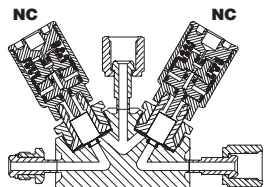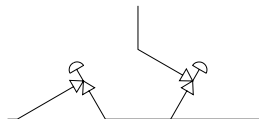

930Y3NC/NCFSFFMA

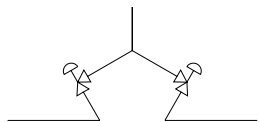

Ordering Example

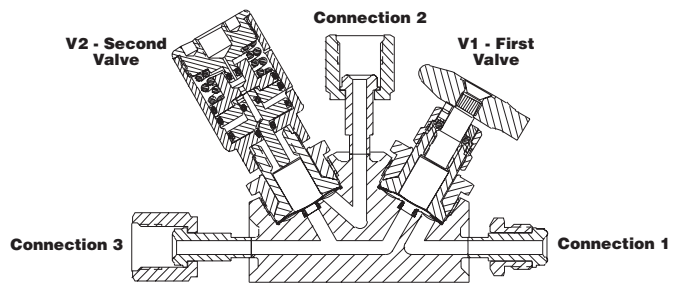

930Y1M/NCFSMFFA

Ordering Information

930Y 1 NO/NC FS MMF A

BASIC SERIES

930Y

FLOW PATH

- 1 = Down Stream Purge
- 2 = Up Stream Purge
- 3 = Common

TYPE (V1/V2)

- I = Indicating Handwheel
- M = Mini Lever
- NC = AOP LP Normally Closed
- NO = AOP LP Normally Open

PORT STYLE


- FS = 1/4" Face Seal
- TS = 1/4" Tube Stub

* Recommended for Nitrous Oxide (N₂O) Service.

Elgiloy® is a registered trademark of Elgiloy Company.
Vespe® is a registered trademark of DuPont Company.
PEEK™ is a registered trademark of Pictrex plc.

Flow Curve

.3 C_v Actuator Types

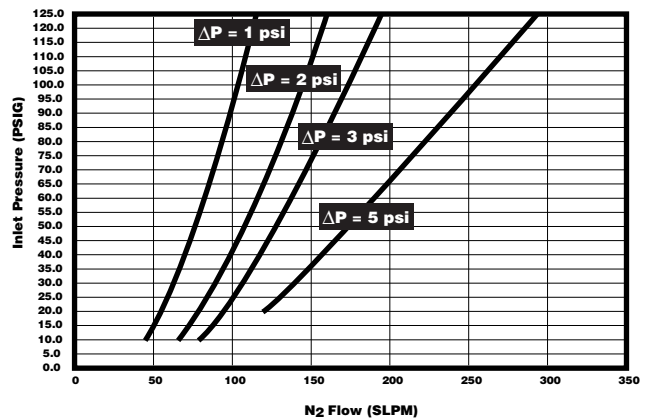

DIMENSIONS

- A = 4.69 x 2.15
- B = 4.06 x 2.66 (FSF or TS only)

OPTIONAL FEATURES

- RD = Red Lever
- BK = Black Lever
- PEEK = PEEK™ Seats
- VESP = Vespe® Seats*

PORT CONFIGURATION

- M = Face Seal Male
- F = Face Seal Female
- Blank = Tube Stub



QUANTUM 945 Valve



Parker Hannifin Corporation's Veriflo Division presents the Quantum 945 Valve. The 945 was designed specifically for semiconductor process control and have all of the features and benefits of the 944 Series with reduced internal volume and body size.

A unique feature of the 945 is the machined-on tube stubs, which allows for improved dimensional control.



features

- ▶ "VeriClean", low sulfur high purity 316L Stainless Steel™ enhances electropolishing, welding and corrosion resistance.
- ▶ Standard Surface Finish is 5 micro inch Ra.
- ▶ Machined on tube stubs or fixed male Face Seal connections.
- ▶ Fully field serviceable seat can be replaced without special tools.
- ▶ Interchangeable actuators without breaking into wetted area.
- ▶ Internally threadless and springless.
- ▶ NO (normally open) or NC (normally closed) actuator available.
- ▶ Fully functional under vacuum conditions.
- ▶ Unique patented compression member which loads the seal uniformly without the need for threaded components or crimping operations.



materials of construction

Wetted

Body . . . "VeriClean", Veriflo's custom high purity type 316L Stainless Steel™, optional Hastelloy C-22®
 Seat PCTFE, optional Vespel®
 Diaphragm Elgiloy® or equivalent
 Compression member "VeriClean", Veriflo's custom high purity type 316L Stainless Steel, optional Hastelloy C-22®

Non-wetted

Nut 316L Stainless Steel
 Cap 316L Stainless Steel

operating conditions

Maximum operating pressure:
 AOPHP and Manual 3500 psig (240 barg)
 AOPLP and Toggle 125 psig (8.6 barg)
 For oxygen Refer to CGA G-4.4 Industrial Practices for Gaseous Oxygen

Minimum operating pressure Vacuum

Actuation pressure:
 AOPLP 60 to 120 psig (4 barg to 8.3 barg)
 AOPHP 75 psig nominal (5 barg)
 Temperature -40°F to 150°F (-40°C to 66°C)
 Bakeout 250°F (121°C) in the open position

functional performance

Flow capacity:
 AOP,G,S,I $C_v = 0.25$
 Lever $C_v = 0.18$
 (SEMI Flow Coefficient Test #F-32-0998)

Design Leak Rate:
 Outboard 1×10^9 scc/sec He
 Inboard 2×10^{10} scc/sec He
 Across Seat 4×10^9 scc/sec He

Design Proof Pressure:
 AOPHP and Manual 5250 psig (362 barg)
 AOPLP and Toggle 188 psig (13 barg)

Design Burst Pressure:
 AOPHP and Manual 10500 psig (724 barg)
 AOPLP and Toggle 375 psig (26 barg)

standard connections

Any combination of FS male and / or female fittings or tube stubs including as many as five ports.

See Valve Selection Guide

internal volume

1.26 cc (no glands); 2.7 cc (including glands)

surface finishes

5 micro inch Ra (.13 micro meter) or less


approximate weight

0.9 lbs (0.42 kgm)




QUANTUM 945 Valve

Dimensional Drawing



945M






945I

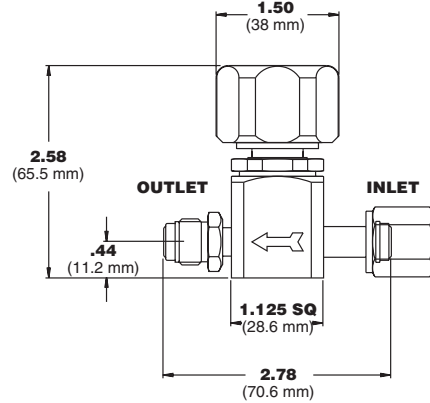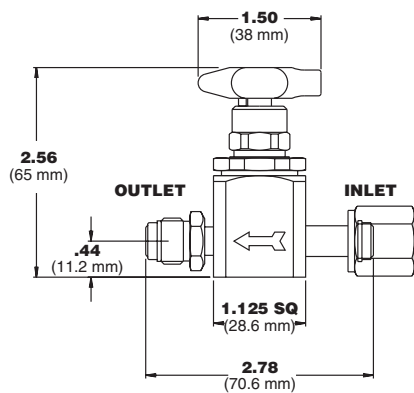

945GLK BRACKET

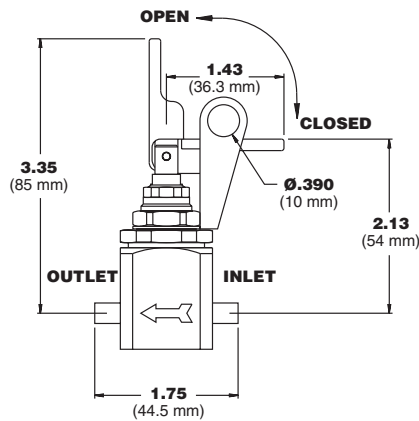

945MLK CLAMP

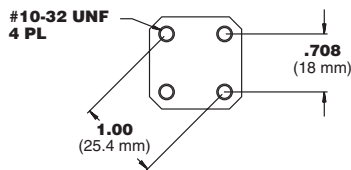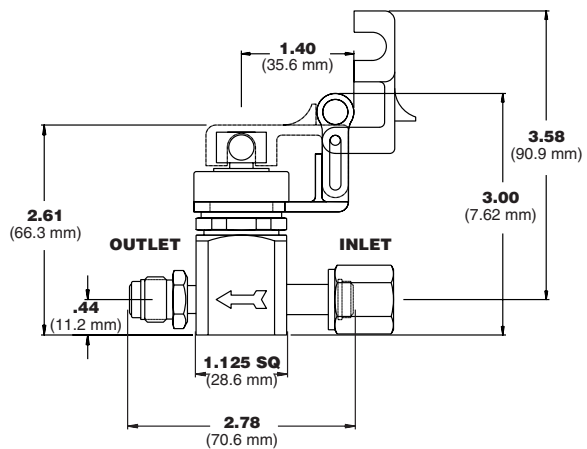


Standard Mounting Hole Pattern


QUANTUM 945 Valve

Dimensional Drawing


945AOPLPNC

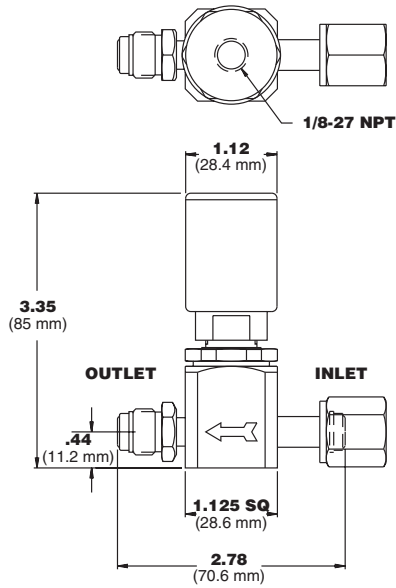


945AOPLPNO

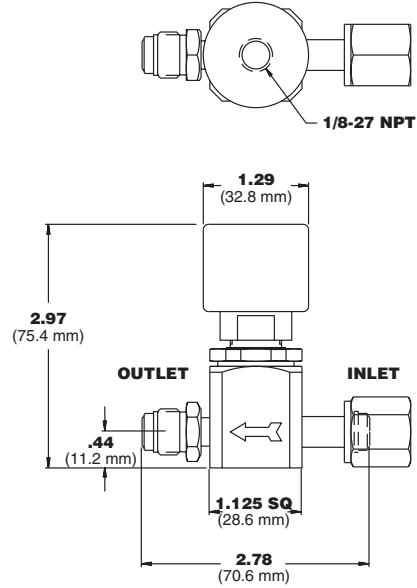

945LSFS8FM

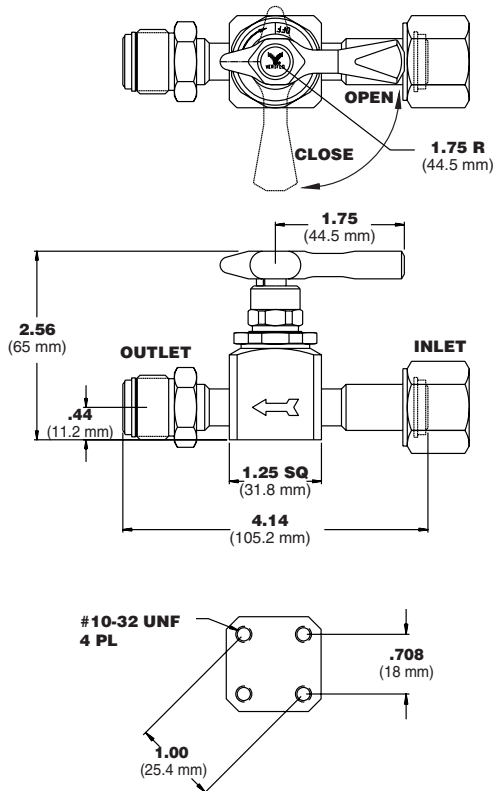


945AOPHPNCST6

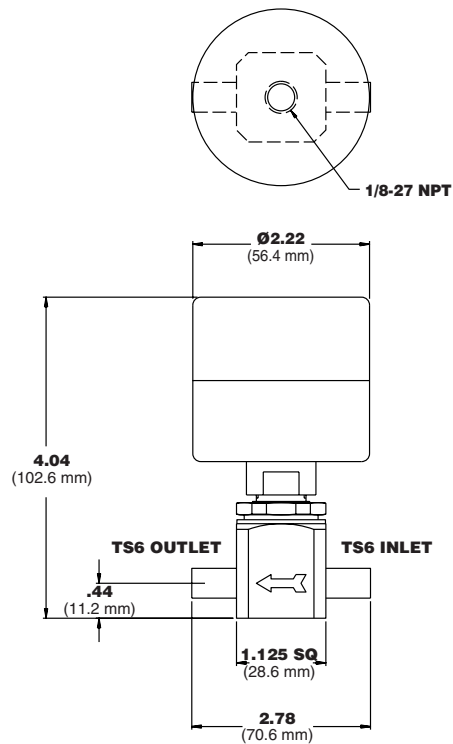

Standard Mounting Hole Pattern

QUANTUM 945 Valve

Flow Curve

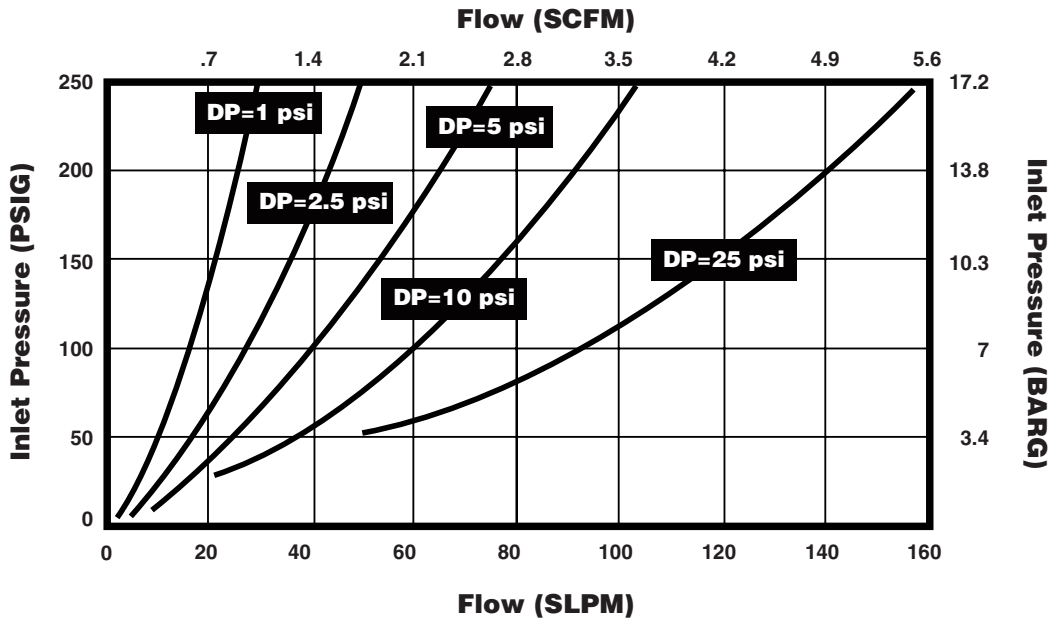

Ordering Information

945 L S FSMM VESP

BASIC SERIES

945

TYPE

- AOPHPNC = Air Operated, High Pressure, Normally Closed
- AOPLPNC = Air Operated, Low Pressure, Normally Closed
- AOPLPNO = Air Operated, Low Pressure, Normally Open
- G = Toggle
- I = Indicating Handwheel
- L = Lever
- M = Mini Lever
- S = Handwheel

MATERIAL

- S = 316L Stainless Steel
- H = Hastelloy C-22[®]*

* Includes Hastelloy C-22[®] body and compression member

** LockOut-TagOut Clamp for M Type Valves

LockOut-TagOut Bracket for G Type Valves

*** Not available with Indicating Handwheel (I) or AOP Type Valves

**** Recommended for Nitrous Oxide (N₂O) Service

◆ 1/2" Connections Use Larger Body Size, Please See Dimensional Drawings

OPTIONAL FEATURES

- LK = LockOut-TagOut**
- PM = Panel Mount***
- TH = Hastelloy C-22[®] Trim (Compression Member)
- VESP = Vespel[®] Seat****
- BK = Black Lever or Handwheel
- BU = Blue Indicating Handwheel
- 2.3 = 1/4" Fixed Male Face Seals (2 ported only)

CONNECTIONS

- FSMM = 1/4" Face Seal, Male in-Male out
- FSFF = 1/4" Face Seal, Female in-Female out
- FSFM = 1/4" Face Seal, Female in- Male out
- FSMF = 1/4" Face Seal, Male in-Female out
- FS8MM = 1/2" Face Seal, Male in-Male out
- FS8FF = 1/2" Face Seal, Female in-Female out
- FS8FM = 1/2" Face Seal, Female in- Male out
- FS8MF = 1/2" Face Seal, Male in-Female out
- TS = 1/4" Tube Stubs
- TS6 = 3/8" Tube Stubs
- TS8 ◆ = 1/2" Tube Stubs

Note: See Valve Selection Guide for multiple porting selections.

Vespel[®] is a registered trademark of DuPont Company.

PEEK[™] is a registered trademark of Victrex plc.

Elgiloy[®] is a registered trademark of Elgiloy Company.

Hastelloy C-22[®] is a registered trademark of Haynes International, Inc.




QUANTUM 945Y

High Purity Manifold Valve



Parker Hannifin Corporation's Veriflo Division presents the 945Y. The 945Y is a custom built high-purity diaphragm valve manifold, engineered to meet the specific requirements of semiconductor OEM tool manufacturers.

The 945Y is a sophisticated design with Veriflo's proven ultra high purity, low internal volume components. Space savings and fewer welds make the 945Y ideal for process control and purge systems.

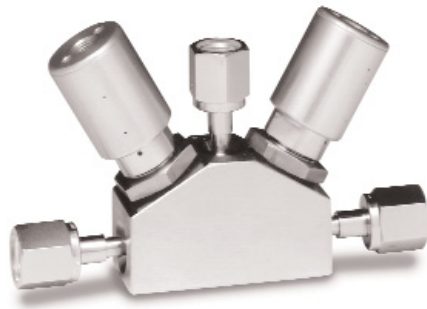

features

- ▶ High cycle life.
- ▶ Ideal for valve manifold boxes (VMB).
- ▶ Fully field serviceable seat can be replaced without special tools.
- ▶ Ultra high performance.
- ▶ Internally threadless and springless.
- ▶ NO (normally open), NC (normally closed), or manual actuators available.
- ▶ Fully functional under all vacuum conditions.
- ▶ Unique patented compression member which loads the seal uniformly without the need for threaded component or crimping operations.

materials of construction

Wetted

Body "VeriClean", Veriflo's custom high purity Type 316L VAR Stainless Steel™
Seat PCTFE, optional Vespel®, PEEK™
Diaphragm Elgiloy® or equivalent
Compression member . . . "VeriClean", Veriflo's custom high purity type 316L VAR Stainless Steel
optional Hastelloy C-22®

Non-wetted

Nut: 316L stainless steel
Cap: 316L stainless steel

Actuator material

Body Anodized aluminum
Pistons Brass
O-ring seals Viton®

operating conditions

Maximum operating pressure:
AOPHP and Manual 3500 psig (240 barg)
AOPLP and Manual 125 psig (8.6 barg)
For oxygen Refer to CGA G-4.4
Industrial Practices for Gaseous Oxygen

Minimum operating pressure Vacuum

Actuation pressure:

AOPLP 60 to 120 psig (4 barg to 8.3 barg)
AOPHP 75 psig nominal (5 barg)
Temperature -40°F to 150°F (-40°C to 66°C)
Bakeout 250°F (121°C) in the open position

functional performance

Flow capacity
Process valve C_v 0.25
Purge Valve C_v 0.17
(SEMI Flow Coefficient Test #F-32-0998)

Design Leak Rate:

Across Seat 4×10^9 scc/sec He
Inboard 2×10^{10} scc/sec He
Outboard 1×10^9 scc/sec He

surface finishes

Standard Ra 10 micro inch
(.25 micro meter) or less

Optional Ra EV = 5 micro inch
(.13 micro meter) or less

standard connections

Any combination of FS male and / or female fittings:
1/4" Gland to gland length 4.69 or 4.06
(see dimensional drawing)

1/4" tube stubs inlet and outlet available:

End to end length: 3.62

internal volume

4.26 cc





approximate weight

2.1 lbs (0.98 kgm)




QUANTUM 945Y

Dimensional Drawings

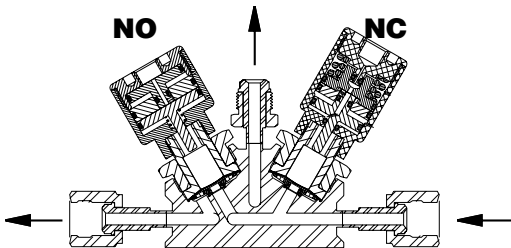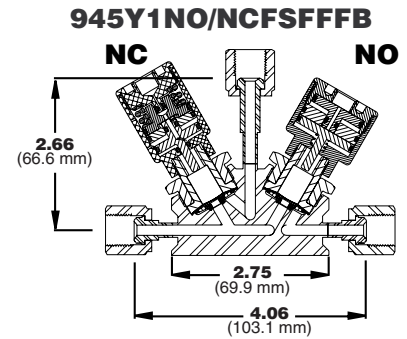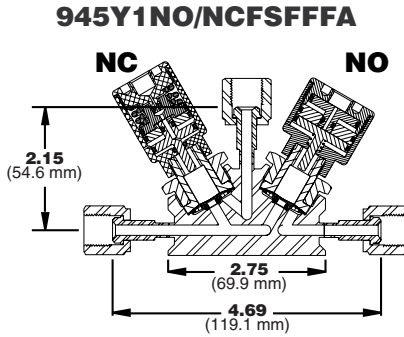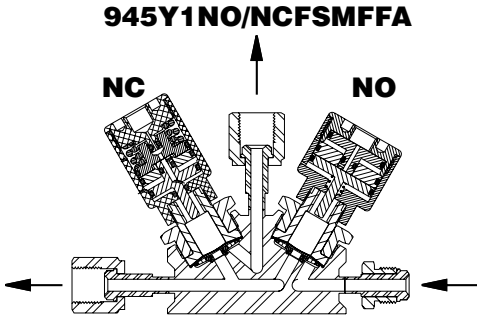

945Y2NC/NOFSMFA

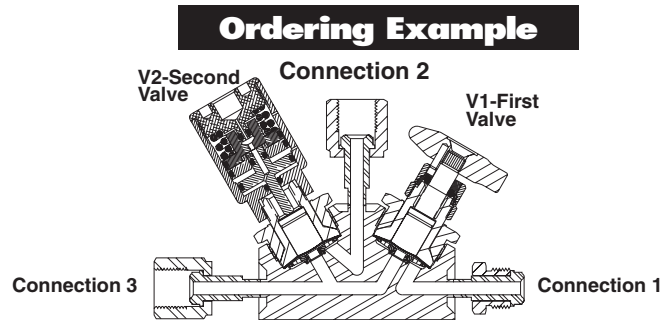

Ordering Example

945Y1M/NCFSMFFA

Ordering Information

945Y 1 NO/NC FS MFF TH A

BASIC SERIES

945Y

FLOW PATH

- 1 = Down Stream Purge
- 2 = Up Stream Purge
- 3 = Common

TYPE (V1/V2)

- HP= AOPHP Normally Closed*
- I = Indicating Handwheel
- M = Mini Lever
- NC= AOPLP Normally Closed
- NO = AO LP Normally Open

- * Note: HP can only be used in combination with HP or M type actuators.
- ** Recommended for Nitrous Oxide (N₂O) Service

Hastelloy C-22[®] is a registered trademark of Haynes International, Inc.
 Vespe[®] is a registered trademark of DuPont Company.
 Viton[®] is a registered trademark of DuPont Elastomers Company.
 Elgiloy[®] is a registered trademark of Elgiloy Company.
 PEEK[™] is a registered trademark of Victrex plc.

DIMENSIONS

- A = 4.69 x 2.15
- B = 4.06 x 2.66 (FSF or TS Only)

OPTIONAL FEATURES

- TH = Hastelloy C-22[®] Trim (Compression Member)
- PEEK = PEEK[™] Seats
- VESP = Vespe[®] Seats**


PORT CONFIGURATION

- M = Face Seal Male
- F = Face Seal Female

PORT STYLE

- FS = 1/4" Face Seal Male
- TS = 1/4" Tube Stub

Flow Curve

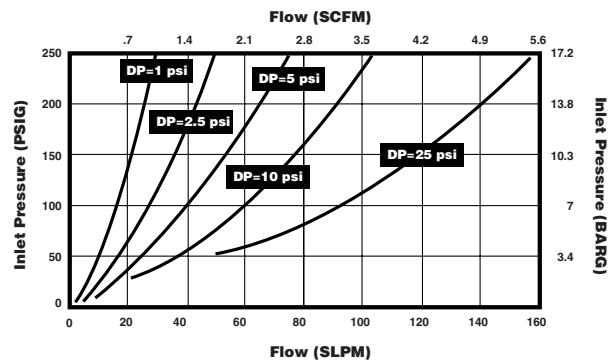



Parker Hannifin Corporation's Veriflo Division presents the Quantum 955 Manually Operated diaphragm valve. The 955 provides higher flows in an exceptionally clean, compact device.



features

- ▶ .55 C_v flow capacity.
- ▶ "VeriClean" low sulfur high purity 316L Stainless Steel™, which enhances electropolishing, welding, and corrosion resistance.
- ▶ Internally threadless and springless.
- ▶ Ideal for low vapor pressure gases.
- ▶ Fully functional from vacuum to 250 psig.
- ▶ Aerodynamic, smooth flow passages.
- ▶ Minimum particle generation and entrapment.
- ▶ High cycle life.
- ▶ 100% Helium leak tested.
- ▶ "Hurricane" cleaning, Veriflo's proprietary cleaning process, removes metallic ions, organic films and surface adhering particles.

materials of construction

Wetted

Body "VeriClean", Veriflo's custom high purity Type 316L Stainless Steel™, Hastelloy® C-22
Seat PCTFE, optional Vespel®, PEEK™
Diaphragm Elgiloy® or equivalent

Non-Wetted

Nut 316L Stainless Steel
Cap 316L Stainless Steel

operating conditions

Maximum operating pressure 250 psig
(17.22 barg)
For oxygen Refer to CGA G-4.4
Industrial practices for gaseous oxygen

Minimum operating pressure Vacuum
Temperature -40°F to 150°F (-40°C to 65°C)
Bake out 250°F (121°C) in the open position

functional performance

Flow capacity $C_v = .55$
(SEMI Flow Coefficient Test #F-32-0998)

Design Leak Rate:

Outboard 1×10^{-9} scc/sec He
Inboard 2×10^{-10} scc/sec He
Across seat 4×10^{-9} scc/sec He

Design Proof Pressure 375 psig (26 barg)
Design Burst Pressure 750 psig (52 barg)

standard connections

Any combination of FS male and/or female fittings:

1/4" Gland to gland length 2.96 in.
(75.1 mm)
Optional 2.78 in. (70.6 mm)

Tube stubs inlet and outlet:

End to end length 2.25 in. (57.1 mm)

Note : Other configurations available as options including as many as five ports

internal volume

3.29 cc (including face seal fittings)

surface finishes


Standard Ra 5 micro inch
(.13 micro meter) or less

approximate weight


.81 lbs (.36 kg)

QUANTUM 955

Dimensional Drawing

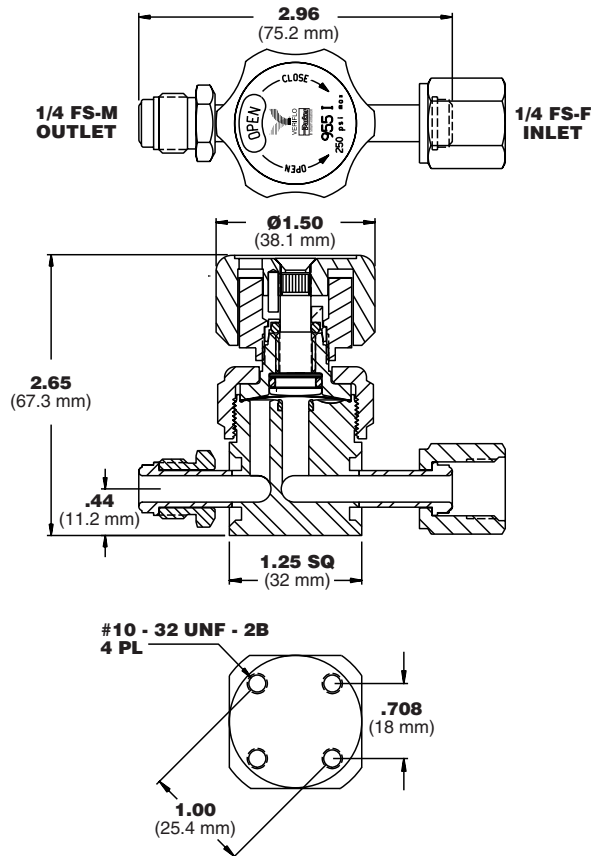

Flow Curve

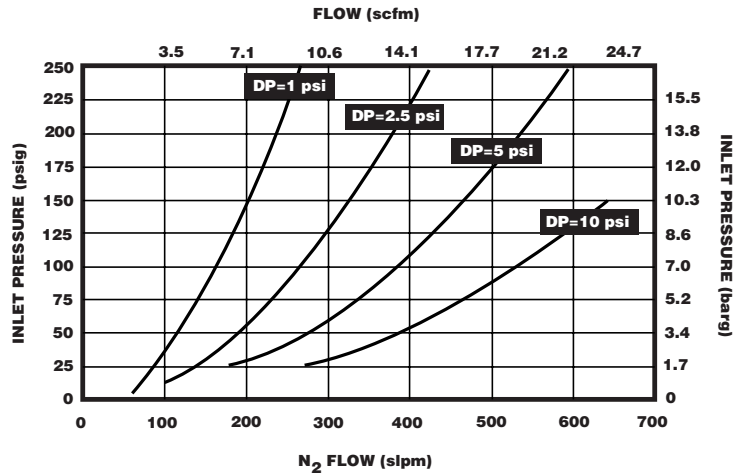

Nitrogen gas was used for flow curves.

1/4" FS	2.96" (75.1 mm) STD
1/2" FS8	4.20" (106.7 mm) STD
1/4" TS	2.25" (57.1 mm)
3/8" TS6	2.25" (57.1 mm) STD
1/2" TS8	2.25" (57.1mm) STD
1/4" FS	2.78 (70.6 mm) Optional

Ordering Information

955 L S FSMM VESP

BASIC SERIES
 955

TYPE
 G = Toggle
 I = Indicating Handwheel
 L = Lever
 M = Mini Lever

MATERIAL
 S = 316L VAR Stainless Steel
 H = Hastelloy C-22®

OPTIONAL FEATURES
 BL008 = Bleed Valve .008 Orifice
 BL015 = Bleed Valve .015 Orifice
 LK = LockOut-TagOut*
 PM = Panel Mount**
 VESP = Vespel® Seat***
 PEEK = PEEK™ Seat
 2.78 = 2.78" End-To-End (1/4" FS Only)

CONNECTIONS
 FSMM = 1/4" Face Seal, Male in-Male out
 FSFF = 1/4" Face Seal, Female in-Female out
 FSFM = 1/4" Face Seal, Female in-Male out
 FSMF = 1/4" Face Seal, Male in-Female out
 FS8MM = 1/2" Face Seal, Male in-Male out
 FS8FF = 1/2" Face Seal, Female in-Female out
 FS8FM = 1/2" Face Seal, Female in-Male out
 FS8MF = 1/2" Face Seal, Male in-Female out
 TS = 1/4" Tube Stub
 TS6 = 3/8" Tube Stub
 TS8 = 1/2" Tube Stub

* LockOut-TagOut Clamp for M Type Valves
 LockOut-TagOut Bracket for G Type Valves
 ** Not available with Indicating Handwheel (I)
 *** Recommended for Nitrous Oxide (N₂O) Service

Note: See Valve Selection Guide for multiple porting selections.

Hastelloy C-22® is a registered trademark of Haynes International, Inc.
 Vespel® is a registered trademark of DuPont Company.
 Elgiloy® is a registered trademark of Elgiloy Company.
 PEEK™ is a registered trademark of Victrex plc.



Parker Hannifin Corporation's Veriflo Division presents the Quantum 955 Air-Operated diaphragm valve. The 955AOPLP is ideal for low vapor pressure gasses such as WF6 and BCL3.



features

- ▶ .55 Cv flow capacity.
- ▶ "VeriClean" low sulfur high purity 316L VAR Stainless Steel™, which enhances electropolishing, welding, and corrosion resistance.
- ▶ Internally threadless and springless.
- ▶ Fully functional from vacuum to 125 psig.
- ▶ Ideal for low vapor pressure gasses.
- ▶ Aerodynamic, smooth flow passages.
- ▶ Minimum particle generation and entrapment.
- ▶ High cycle life (including corrosive service).
- ▶ 100% Helium leak tested.
- ▶ "Hurricane" cleaning, proprietary cleaning process, removes metallic ions, organic films and surface adhering particles.

materials of construction

Wetted

Body "VeriClean", Veriflo's custom high purity type 316L VAR Stainless Steel™, Hastelloy C-22®
Seat. PCTFE, optional Vespel®, PEEK™
Diaphragm. Elgiloy® or equivalent

Non-Wetted

Nut 316L Stainless Steel
Cap 316L Stainless Steel
Actuator Housing Aluminum

operating conditions

Maximum operating pressure 125 psig (8.6 barg)

Minimum operating pressure. Vacuum

Temperature -40°F to 150°F (-40°C to 66°C)

Bake out 250°F (121°C) in the open position

Actuator pressure. 60-120 psig (4-8.3 barg)

functional performance

Flow capacity $C_v = .55$
(SEMI Flow Coefficient Test #F-32-0998)

Design Leak Rate:

Outboard 1×10^9 scc/sec He

Inboard 2×10^{10} scc/sec He

Across seat 4×10^9 scc/sec He

standard connections

Any combination of 1/4" FS male and/or female fittings:

Gland to gland length 2.96 in. (75.1 mm)

Optional 2.78 in. (70.6 mm)

Tube stubs inlet and outlet:

End to end length 2.25 in. (57.1 mm)

Other configurations available as options— including as many as four ports. see Valve Selection Guide

internal volume

3.29 cc (including face seal fittings)

surface finishes


Standard Ra 5 micro inch (.13 micro meter) or less

approximate weight



.81 lbs (.36 kg)

QUANTUM 955AOPLP


Dimensional Drawing

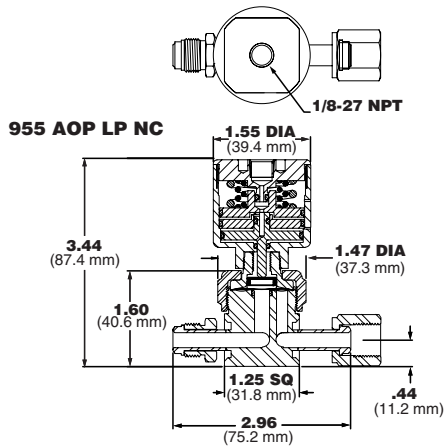

SEE TABLE FOR OTHER CONNECTION DIMENSIONS

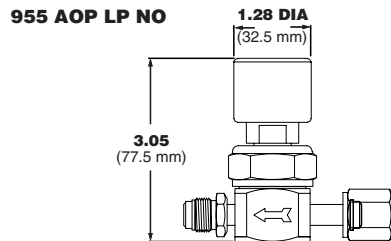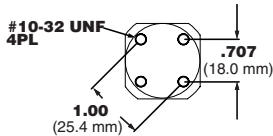

Flow Curve

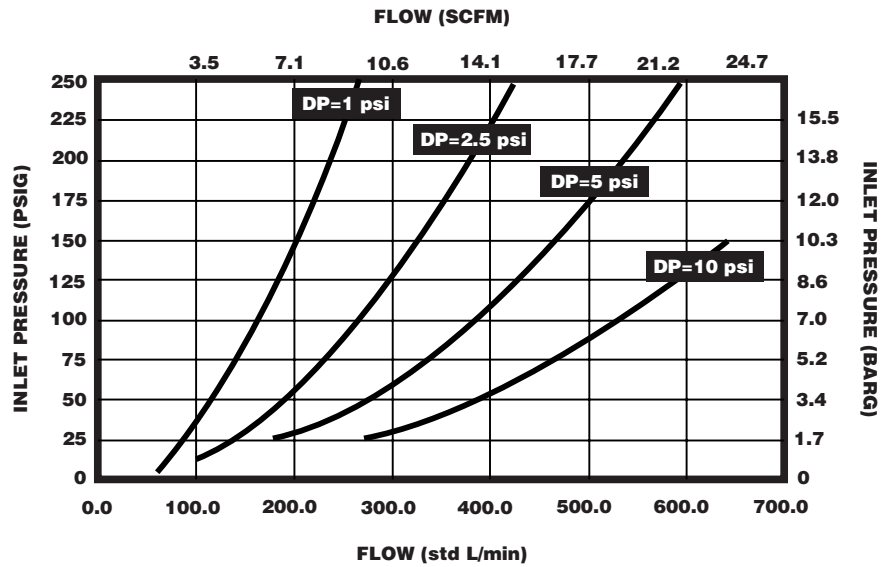

Connection	End to End Length
1/4" FS	2.96" (75.1 mm) STD
1/4" FS	2.78" (70.6 mm) Optional
1/4" TS	2.25" (57.1 mm) STD
3/8" TS6	2.25" (57.1 mm) STD
1/2" TS8	2.25" (57.1 mm) STD
1/2" FS8	4.20 (106.7 mm) STD

Ordering Information

955AOPLP NC S FSMM VESP

BASIC SERIES

955AOPLP = 955 Air Operated, Low Pressure

TYPE

NC = Normally Closed

NO = Normally Open

MATERIAL

S = 316L VAR Stainless Steel

H = Hastelloy C-22®

OPTIONAL FEATURES

BL008 = Bleed Valve .008 Orifice

BL015 = Bleed Valve .015 Orifice

LS = Limit Switch

PEEK = PEEK™ Seat

VESP = Vespel® Seat*

2.78 = 2.78" End-To-End (1/4" FS Only)

CONNECTIONS

FSMM = 1/4" Face Seal, Male in-Male out

FSFF = 1/4" Face Seal, Female in-Female out

FSFM = 1/4" Face Seal, Female in-Male out

FSMF = 1/4" Face Seal, Male in-Female out

FS8MM = 1/2" Face Seal, Male in-Male out

FS8FF = 1/2" Face Seal, Female in-Female out

FS8FM = 1/2" Face Seal, Female in-Male out

FS8MF = 1/2" Face Seal, Male in-Female out

TS = 1/4" Tube Stub

TS6 = 3/8" Tube Stub

TS8 = 1/2" Tube Stub

* Recommended for Nitrous Oxide (N₂O) Service

Note: Refer to Valve Selection Guide for multiple porting selections.

Hastelloy C-22® is a registered trademark of Haynes International, Inc.

Vespel® is a registered trademark of DuPont Company.

Viton® is a registered trademark of DuPont Elastomers Company.

Elgiloy® is a registered trademark of Elgiloy Company.

PEEK™ is a registered trademark of Vitrex plc.



QUANTUM 955Y

High Purity, High Flow Manifold Valve



Parker Hannifin Corporation's Veriflo Division presents the 955Y. The 955Y is a custom built high-purity, high-flow diaphragm valve manifold, engineered to meet the specific requirements of semiconductor OEM tool manufacturer and point-of-use gas delivery systems.

The 955 Y is a sophisticated design with Veriflo's proven ultra high purity, low internal volume components. Space savings and fewer welds make the 955Y ideal for process control and purge systems.



features

- ▶ High cycle life.
- ▶ Ideal for valve manifold boxes (VMB).
- ▶ Ultra high performance.
- ▶ Change over from normally closed (NC) to normally open (NO) without intruding into wetted area.
- ▶ Fully functional under vacuum conditions.
- ▶ Large Cv ideal for low vapor pressure gases such as WF₆ and chlorinated gases such as HCl, Cl₂ and BCl₃.



materials of construction

Wetted

Body "VeriClean", Veriflo's custom high purity Type 316L VAR Stainless Steel™
Seal PCTFE, optional Vespel®, PEEK™
Diaphragm Elgiloy® or equivalent

Non-wetted

Nut 316L stainless steel
Cap 316L stainless steel

Actuator material

Body Anodized aluminum
Pistons Brass
O-ring seals Viton®

operating conditions

Maximum operating pressure:
AOPLPNCNO 125 psig (8.6 barg)
Manual 125 psig (8.6 barg)
Minimum operating pressure Vacuum
For oxygen Refer to CGA G-4.4
Industrial Practices for Gaseous Oxygen
Temperature -40°F to 150°F (-40°C to 66°C)
Bakeout 250°F (121°C) in the open position

surface finishes

Standard Ra 10 micro inch
(.25 micro meter) or less
Optional Ra EV=5 micro inch
(.13 micro meter) or less

functional performance

Flow capacity C_v 0.43 Process valve
(SEMI Flow Coefficient Test #F-32-0998)
Purge Valve C_v 0.35

Design Leak Rate:

Across Seat 4 x 10⁹ scc/sec He
Inboard 2 x 10¹⁰ scc/sec He
Outboard 1 x 10⁹ scc/sec He

standard connections

Any combination of FS male and / or female fittings:
1/4" Gland to gland length 4.69 or 4.06
(see dimensional drawing)

1/4" tube stubs inlet and outlet available:
End to end length: 3.62

internal volume


4.49 cc

approximate weight



2.11 lbs (0.98 kgm)

QUANTUM 955Y



Cross Sectional Drawings

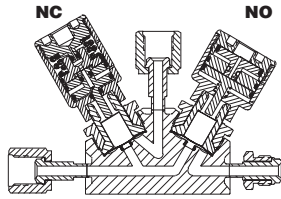


955Y1NO/NCFSMFFA

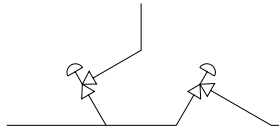


955Y2NC/NOFSMFFA

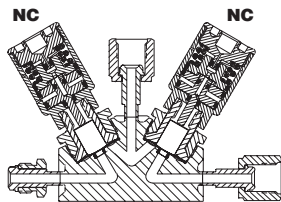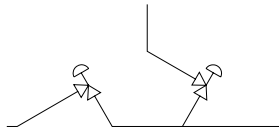


955Y3NC/NCFSFFMA

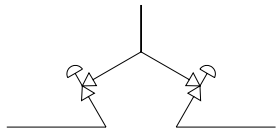

Dimensional Drawings




955Y1NO/NCFSFFFA

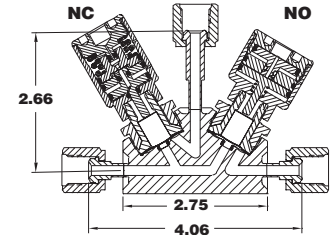

955Y1NO/NCFSFFFB

Ordering Example

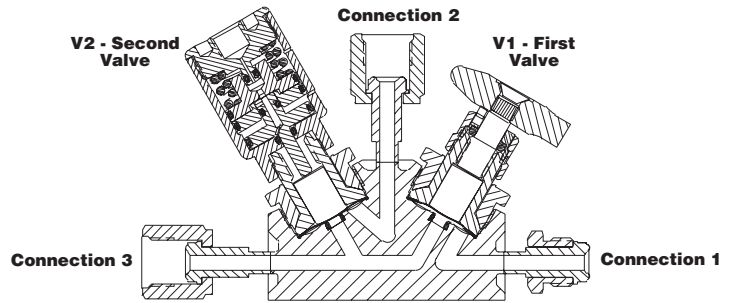

955Y1M/NCFSMFFA

Ordering Information

BASIC SERIES

955Y

FLOW PATH

- 1 = Down Stream Purge
- 2 = Up Stream Purge
- 3 = Common

TYPE (V1/V2)

- NC = AOP LP Normally Closed
- NO = AOP LP Normally Open
- M = Mini Lever
- I = Indicating Handwheel

* Recommended for Nitrous Oxide (N₂O) Service

Hastelloy C-22® is a registered trademark of Haynes International, Inc.
 Kel-F 81® is a registered trademark of 3M Company.
 Vespel® is a registered trademark of DuPont Company.
 Viton® is a registered trademark of DuPont Elastomers Company.
 Elgiloy® is a registered trademark of Elgiloy Company.
 PEEK™ is a registered trademark of Victrex plc.

955Y 1 NO/NC FS MFF TH A

DIMENSIONS

- A = 4.69 x 2.15 (FS M or FS F)
- B = 4.06 x 2.66 (FS F only)

OPTIONAL FEATURES

- VESP = Vespel®*
- PEEK™ = PEEK™ Seat


PORT CONFIGURATION

- M = Face Seal Male
- F = Face Seal Female

PORT STYLE

- FS = 1/4" Face Seal
- TS = 1/4" Tube Stub

Flow Curve

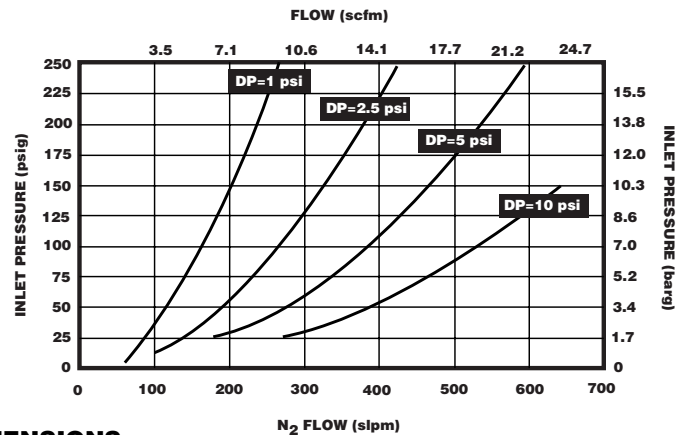

TITAN II® AOP PLUS High Pressure Diaphragm Valve




Parker Hannifin Corporation's Veriflo Division presents the TITAN II® AOP Plus high pressure diaphragm valve. The TITAN II® AOP is specifically designed for high pressure, high cycle, ultra high purity applications.



features

- ▶ "VeriClean", Veriflo's custom high purity Type 316L Stainless Steel™
- ▶ Springless, stemless design.
- ▶ Metal diaphragm sealed.
- ▶ Back panel mounting capabilities.
- ▶ High cycle life.
- ▶ Fully swept flow path.
- ▶ Standard 6 inch micro Ra (0.15 micro meter), EP Surface Finish.
- ▶ 100% Helium leak tested.
- ▶ Reduced seat volume.
- ▶ Normally open and normally closed designs from vacuum to 3000 psig (207 barg)

Actuator Pressure vs. System Pressure (Minimum Values)

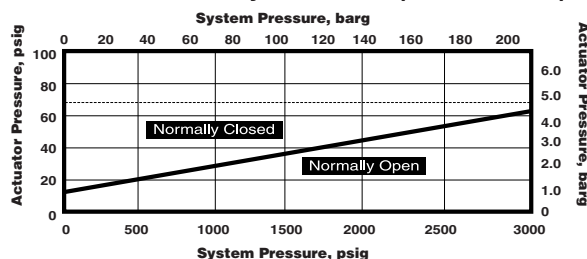

materials of construction

Wetted

Body "VeriClean", Veriflo's custom high purity Type 316L Stainless Steel™ optional Hastelloy C-22® or Nickel 200
 Seat PCTFE, optional Vespel®
 Diaphragm Elgiloy®

Non-wetted

Actuator Housing Aluminum

operating conditions

Maximum operating pressure 3000 psig (207 barg)
 Minimum operating pressure Vacuum

AOP Actuation:

Normally Closed 70 to 125 psig (4.8 to 8.6 bar)
 Normally Open 70 to 125 psig (4.8 to 8.6 bar)

See Chart Below

Temperature:

PCTFE Seat -65°F to 150°F (-54°C to 65°C)
 Vespel® Seat -65°F to 250°F (-54°C to 121°C)

functional performance

Flow Capacity C_v 0.25

Design Leak Rate:

Outboard 1x10⁻⁹ scc/sec He
 Inboard 1x10⁻⁹ scc/sec He
 Across seat 1x10⁻⁹ scc/sec He

internal volume

1.55 cc


surface finishes

Standard Ra 6 micro inch Ra (0.15 micro meter) EP surface finish



TITAN II® AOP PLUS


Dimensional Drawings

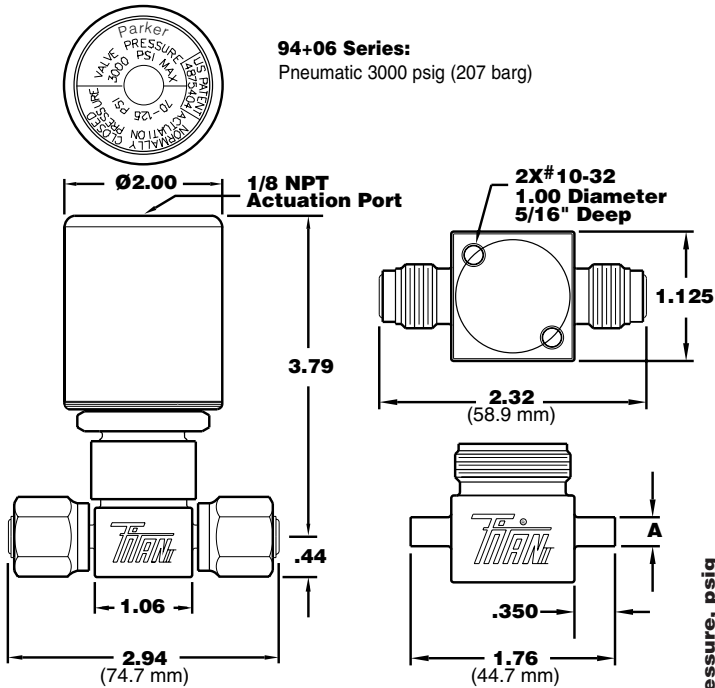

End Connections	Designator	End to End "L" in (mm)	"A" O.D. in (mm)
1/4" Tube Weld	TWTW	1.76 (44.7)	1/4 (6.4)
3/8" Tube Weld	TWTW	1.76 (44.7)	3/8 (9.5)
1/4" VacuSeal™ Male	VMVM	2.31(58.6)	-
1/4" VacuSeal™ Female	VFVF	2.94 (74.7)	-
1/4" VacuSeal™ Male	VMSVMS	3.94 (100.1)	-

Dimensions are for reference only.

Flow Curves

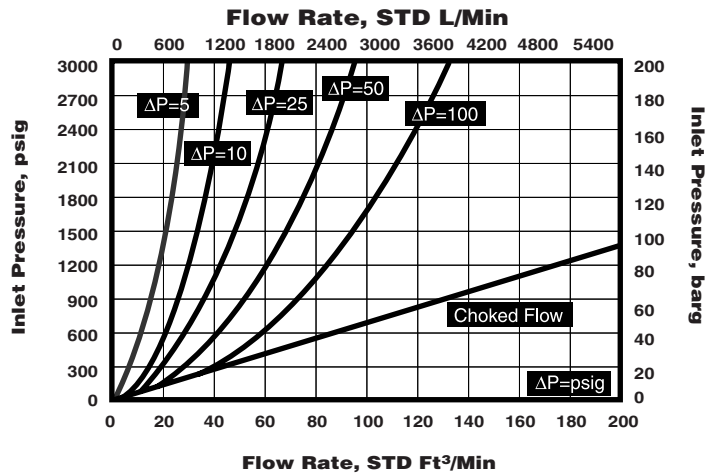

Ordering Information

94 + 06 4 4 2 TW TW - NO

SERIES

94+06 Series = Pneumatic Actuated
3000 psig (207 barg)

INLET PORT SIZE

4 = 1/4"
6 = 3/8"

OUTLET PORT SIZE

4 = 1/4"
6 = 3/8"

MATERIAL

2 = 316L Stainless Steel
16 = Hastelloy C-22®
31 = Nickel

INLET CONNECTION

TW = Tube Weld
VF = VacuSeal™ Female
VM = VacuSeal™ Male (1/4")
VMS = VacuSeal™ Male Swivel

OPTIONAL FEATURES

CB1 = Constant Bleed 1 slpm
CB3 = Constant Bleed 3 slpm
PI = Vespel® Seat†
PTFE Seat (Standard) Leave Blank
NO = Normally Open Actuator
Normally Closed Actuator (Standard) Leave Blank

OUTLET CONNECTION

TW = Tube Weld
VF = VacuSeal™ Female
VM = VacuSeal™ Male (1/4")
VMS = VacuSeal™ Male Swivel

† Recommended for Nitrous Oxide (N₂O) Service

VacuSeal™ is a trademark of Parker Hannifin Corporation.
Elgiloy® is a registered trademark of Elgiloy Corporation.
Hastelloy® is a registered trademark of Haynes International.
Vespel® is a registered trademark of DuPont Company.

TITAN II® AOP PLUS

Medium Pressure Diaphragm Valve




Parker Hannifin Corporation's Veriflo Division presents the TITAN II® AOP Plus medium pressure diaphragm valve. The TITAN II AOP® is specifically designed for medium pressure, medium cycle, ultra high purity applications.



features

- ▶ "VeriClean", Veriflo's custom high purity Type 316L Stainless Steel™
- ▶ Springless, stemless design.
- ▶ Metal diaphragm sealed.
- ▶ Back panel mounting capabilities.
- ▶ High cycle life.
- ▶ Fully swept flow path.
- ▶ Standard 6 inch micro Ra (0.15 micro meter), EP Surface Finish.
- ▶ 100% Helium leak tested.
- ▶ Reduced seat volume.
- ▶ Normally open and normally closed designs from vacuum to 300 psig (20.7 barg)

Actuator Pressure vs. System Pressure (Minimum Values)

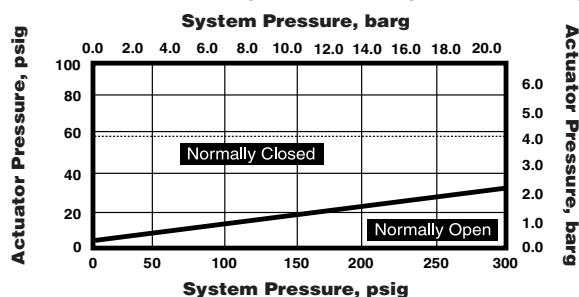

materials of construction

Wetted

Body "VeriClean", Veriflo's custom high purity Type 316L Stainless Steel™ optional Hastelloy C-22® or Nickel 200
 Seat PCTFE, optional Vespel®
 Diaphragm Elgiloy®

Non-wetted

Actuator Housing Aluminum

operating conditions

Maximum operating pressure 300 psig (20.7 barg)

Minimum operating pressure Vacuum

AOP Actuation:

Normally Open 70 to 125 psig (4.8 to 8.6 bar)
 Normally Closed 70 to 125 psig (4.8 to 8.6 bar)

See chart below

Temperature:

PCTFE Seat -65°F to 150°F (-54°C to 65°C)
 Vespel® Seat -65°F to 250°F (-54°C to 121°C)

functional performance

Flow Capacity C_v 0.25

Design Leak Rate:

Outboard 1x10⁻⁹ scc/sec He
 Inboard 1x10⁻⁹ scc/sec He
 Across seat 1x10⁻⁹ scc/sec He

internal volume

1.55 cc


surface finishes

Standard Ra 6 micro inch Ra (0.15 micro meter) EP surface finish




TITAN II® AOP PLUS

Dimensional Drawings




92+06 Series:
Pneumatic 300 psig (20.7 barg)

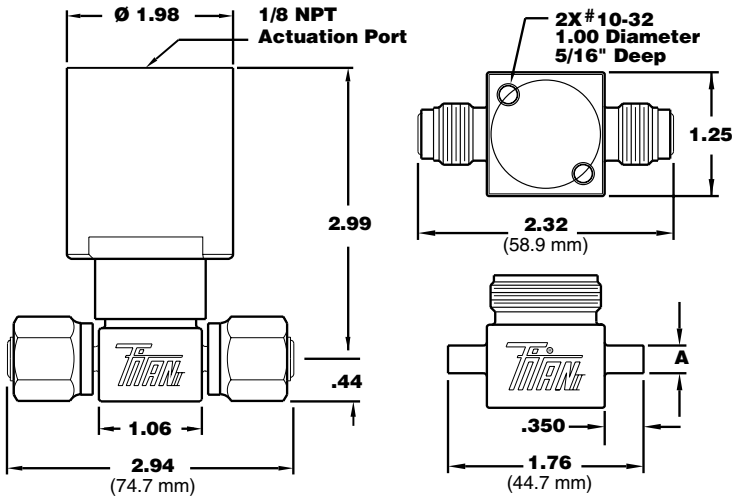

End Connections	Designator	End to End "L" in (mm)	"A" O.D. in (mm)
1/4" Tube Weld	TWTW	1.76 (44.7)	1/4 (6.4)
3/8" Tube Weld	TWTW	1.76 (44.7)	3/8 (9.5)
1/4" VacuSeal™ Male	VMVM	2.31 (58.6)	-
1/4" VacuSeal™ Female	VFVF	2.94 (74.7)	-
1/4" VacuSeal™ Male	VMSVMS	3.94 (100.1)	-

Dimensions are for reference only.

Flow Curves

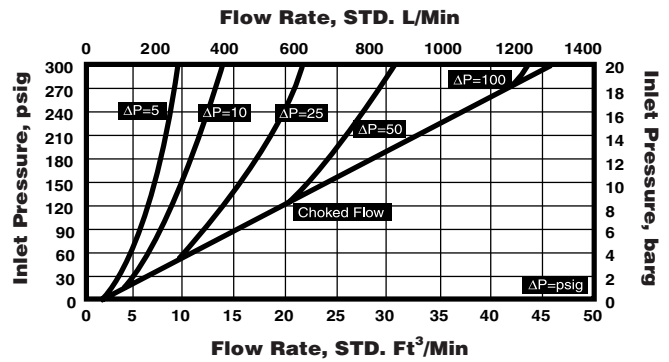

Ordering Information

92 + 06 4 4 2 TW TW - NO

SERIES

92+06 Series = Pneumatic Actuated
300 psig (20.7 bar)

INLET PORT SIZE

4 = 1/4"
6 = 3/8"

OUTLET PORT SIZE

4 = 1/4"
6 = 3/8"

MATERIAL

2 = 316L Stainless Steel
16 = Hastelloy C-22®
31 = Nickel

INLET CONNECTION

TW = Tube Weld
VF = VacuSeal™ Female
VM = VacuSeal™ Male (1/4")
VMS = VacuSeal™ Male Swivel

OPTIONAL FEATURES

CB1 = Constant Bleed 1 slpm
CB3 = Constant Bleed 3 slpm
PI = Vespel® Seat†
PCTFE Seat (Standard) Leave Blank
NO = Normally Open Actuator
Normally Closed Actuator (Standard) Leave Blank

OUTLET CONNECTION

TW = Tube Weld
VF = VacuSeal Female
VM = VacuSeal Male (1/4")
VMS = VacuSeal Male Swivel

† Recommended for Nitrous Oxide (N₂O) Service

VacuSeal™ is a trademark of Parker Hannifin Corporation.
Elgiloy® is a registered trademark of Elgiloy Corporation.
Hastelloy® is a registered trademark of Haynes International.
Vespel® is a registered trademark of DuPont Company.



TITAN II® AOP PLUS Low Pressure Diaphragm Valve




Parker Hannifin Corporation's Veriflo Division presents the TITAN II® AOP Plus low pressure diaphragm valve. TITAN II® AOP is specifically designed for low pressure, low cycle, ultra high purity applications.



features

- ▶ "VeriClean", Veriflo's custom high purity Type 316L Stainless Steel™
- ▶ Springless, stemless design.
- ▶ Metal diaphragm sealed.
- ▶ Back panel mounting capabilities.
- ▶ High cycle life.
- ▶ Fully swept flow path.
- ▶ Standard 6 inch micro Ra (0.15 micro meter), EP Surface Finish.
- ▶ 100% Helium leak tested.
- ▶ Reduced seat volume.
- ▶ Normally open and normally closed designs from vacuum to 150 psig (10.5 barg).

Actuator Pressure vs. System Pressure (Minimum Values)

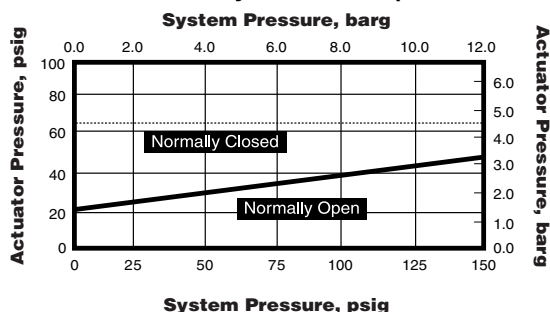

materials of construction

Wetted

Body "VeriClean", Veriflo's custom high purity Type 316L Stainless Steel™ optional Hastelloy C-22® or Nickel 200
 Seat PCTFE, optional Vespel®
 Diaphragm Elgiloy®

Non-wetted

Actuator Housing Aluminum

operating conditions

Maximum operating pressure 150 psig (10.5 barg)

Minimum operating pressure rating . . . Vacuum

AOP Actuation:

Normally Open 70 to 125 psig (4.8 to 8.6 barg)

Normally Closed 70 to 125 psig (4.8 to 8.6 barg)

See chart below

Temperature:

PCTFE Seat -65°F to 150°F (-54°C to 65°C)

Vespel® Seat -65°F to 250°F (-54°C to 121°C)

functional performance

Flow Capacity Cv 0.25

Design Leak Rate:

Outboard 1x10⁹ scc/sec He

Inboard 1x10⁹ scc/sec He

Across seat 1x10⁹ scc/sec He

internal volume

1.55 cc


surface finishes

Standard Ra 6 micro inch Ra (0.15 micro meter) EP surface finish



TITAN II® AOP PLUS


Dimensional Drawings

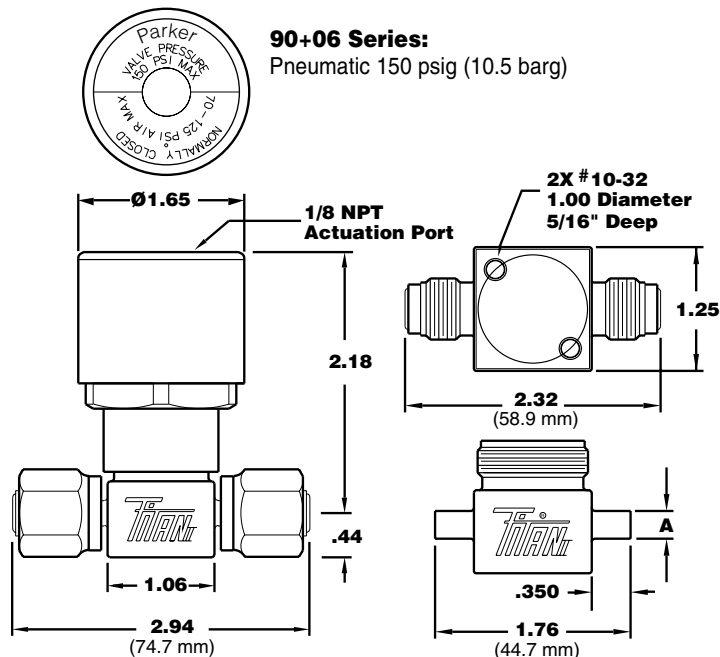


End Connections	Designator	End to End "L" in (mm)	"A" O.D. in (mm)
1/4" Tube Weld	TWTW	1.76 (44.7)	1/4 (6.4)
3/8" Tube Weld	TWTW	1.76 (44.7)	3/8 (9.5)
1/4" VacuSeal™ Male	VMVM	2.31 (58.6)	-
1/4" VacuSeal™ Female	VVVF	2.94 (74.7)	-
1/4" VacuSea™ Male	VMSVMS	3.94 (100.1)	-

Dimensions are for reference only.

Flow Curves

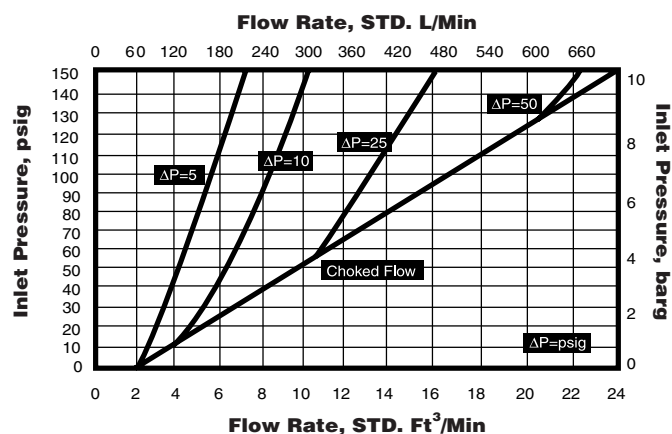

Ordering Information

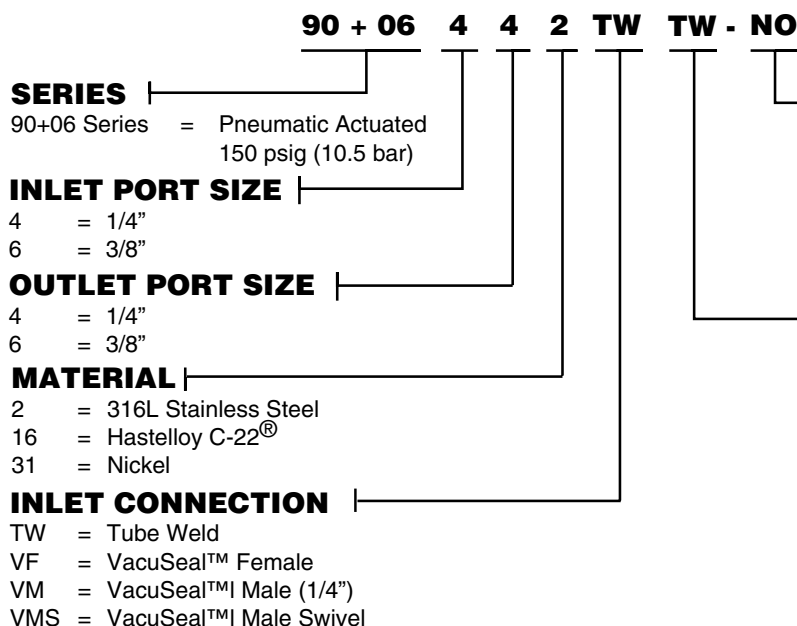

OPTIONAL FEATURES

- CB1 = Constant Bleed 1 slpm
- CB3 = Constant Bleed 3 slpm
- PI = Vespel® Seat†
- PCTFE Seat (Standard) Leave Blank
- NO = Normally Open Actuator
- Normally Closed Actuator (Standard) Leave Blank

OUTLET CONNECTIONS

- TW = Tube Weld
- VF = VacuSeal™ Female
- VM = VacuSeal™ Male (1/4")
- VMS = VacuSeal™ Male Swivel

† Recommended for Nitrous Oxide (N₂O) Service

VacuSeal™ is a trademark of Parker Hannifin Corporation.
Elgiloy® is a registered trademark of Elgiloy Corporation.
Hastelloy® is a registered trademark of Haynes International.
Vespel® is a registered trademark of DuPont Company.





Parker Hannifin Corporation's Veriflo Division presents the TITAN II[®] Manual Plus, springless diaphragm valve, which is specifically designed for high pressure, high cycle, and ultra high purity applications.



features

- ▶ “VeriClean”, Veriflo's custom high purity Type 316L Stainless Steel™.
- ▶ Springless, stemless design.
- ▶ Metal diaphragm sealed.
- ▶ Back panel mounting capabilities.
- ▶ High cycle life.
- ▶ Fully swept flow path.
- ▶ Standard 6 inch micro Ra (0.15 mm), EP Surface Finish.
- ▶ 100% Helium leak tested.
- ▶ Reduced seat volume.
- ▶ Position changeable 1/4 turn lever handle.

▶ materials of construction

Wetted

Body “VeriClean”, Veriflo's custom high purity Type 316L Stainless Steel™ optional Hastelloy C-22[®] or Nickel 200
 Seat PCTFE, Optional Vespel[®]

Non-wetted

Bonnet 303 Stainless Steel
 Handle Aluminum

▶ operating conditions

Maximum operating pressure 3000 psig (207 barg)
 Minimum operating pressure Vacuum

Temperature:

PCTFE Seat -65°F to 150°F (-54°C to 65°C)
 Vespel[®] Seat -65°F to 250°F (-54°C to 121°C)

▶ functional performance

Flow capacity C_v 0.25
 Design Leak Rate:
 Outboard 1x10⁻⁹ scc/sec He
 Inboard 1x10⁻⁹ scc/sec He
 Across seat 1x10⁻⁹ scc/sec He

▶ internal volume

1.55 cc


▶ surface finishes

Standard Ra 6 micro inch Ra (0.15 micro meter) EP surface finish


TITAN II[®] MANUAL PLUS

Dimensional Drawings


06 - Series
1/2 & 1/4 Turn
Round Handle

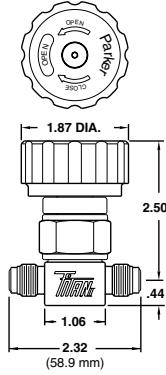


07 - Series:
1/4 Turn Lever Handle

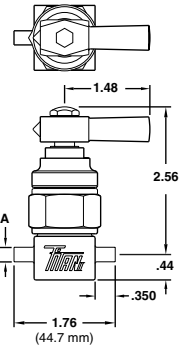

07L - Series:
1/4 Turn Lever Indicator
Positional Handle

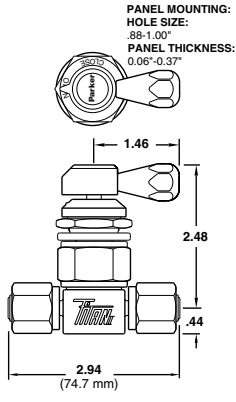



PANEL MOUNTING:
HOLE SIZE:
.88-1.00"
PANEL THICKNESS:
0.06"-0.37"




End Connections	Designator	End to End "L" in (mm)	"A" O.D. in (mm)
1/4" Tube Weld	TWTW	1.76 (44.7)	1/4 (6.4)
3/8" Tube Weld	TWTW	1.76 (44.7)	3/8 (9.5)
1/4" VacuSeal Male	VMVM	2.32 (58.9)	-
1/4" VacuSeal Female	VFVF	2.96 (75.2)	-
1/4" VacuSeal Male Swivel Nut	VMSVMS	3.94 (100.1)	-

Dimensions are for reference only.

Flow Curves

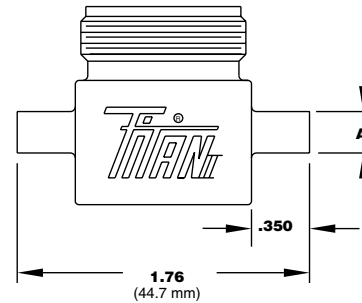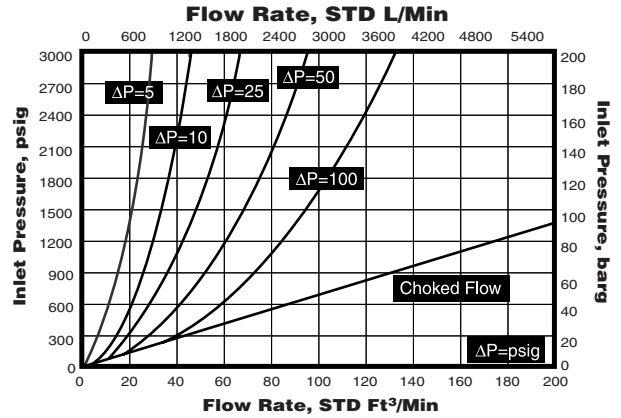

Ordering Information

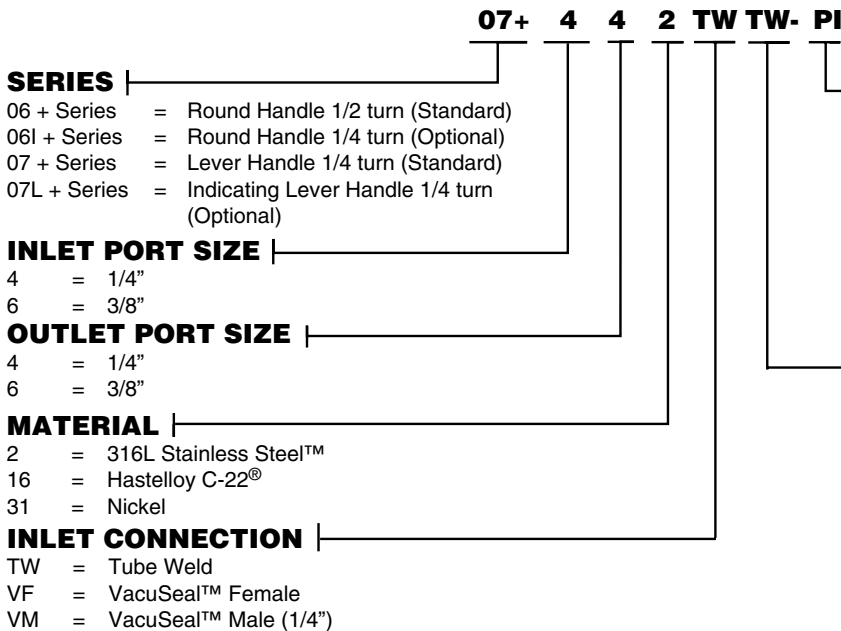

OPTIONAL FEATURES

- CB1 = Constant Bleed 1 slpm
- CB3 = Constant Bleed 3 slpm
- PI = Vespel[®] Seat†
- PCTFE Seat - Standard - Leave Blank
- RD = Red Handle
- WH = White Handle
- Blue Handle - Standard - Leave Blank

Note: Consult factory for additional handle options.

OUTLET CONNECTION

- TW = Tube Weld
- VF = VacuSeal™ Female
- VM = VacuSeal™ Male (1/4")
- VMS = VacuSeal™ Male Swivel

†Recommended for Nitrous Oxide (N₂O) Service

VacuSeal™ is a trademark of Parker Hannifin Corporation.
Elgiloy[®] is a registered trademark of Elgiloy Corporation.
Hastelloy[®] is a registered trademark of Haynes International.
Vespel[®] is a registered trademark of DuPont Company.

Notes: Consult factory for additional Connection options



TITAN II® MS

All Metal, High Pressure Diaphragm Valves



Parker Hannifin Corporation's Veriflo Division presents the TITAN II® MS manual, springless diaphragm valve, which is specifically designed for high temperature, high pressure, high cycle, and ultra high purity applications.



features

- ▶ Springless stemless design.
- ▶ 6 Ra electropolished (EP) internal surface finish.
- ▶ Maximum allowable leakage: 1×10^{-9} scc/sec Helium.
- ▶ "VeriClean", Veriflo's custom high purity Type 316L Stainless Steel™.
- ▶ Manual and pneumatically actuated designs. Actuator pressure to open 70 psig min to 125 psig max.

materials of construction

Wetted

Body "VeriClean", Veriflo's custom high purity Type 316L Stainless Steel™
optional Hastelloy C-22® or Nickel 200
Seat Integral Metal
Diaphragm Elgiloy®

Non-wetted

Bonnet 303 Stainless Steel
Handle Aluminum

operating conditions

Maximum operating pressure 3000 psig
(207 barg)
Minimum operating pressure Vacuum

Maximum Temperature limit: 150°F(65.5°C)

AOP Actuation -70 psig to 125 psig
(4.8 barg to 8.6 barg)

functional performance

Flow capacity C_v 0.27

Design Leak Rate:
Outboard 1×10^{-9} scc/sec He
Inboard 1×10^{-9} scc/sec He
Across seat 1×10^{-9} scc/sec He

internal volume

1.55 cc

surface finishes


Standard Ra 6 micro inch Ra
(0.15 micro meter) EP surface finish




TITAN II® MS

Dimensional Drawings



06 - Series
1/2 & 1/4 Turn
Round Handle

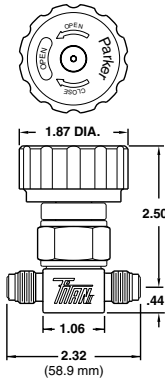

07 - Series:
1/4 Turn Lever Handle

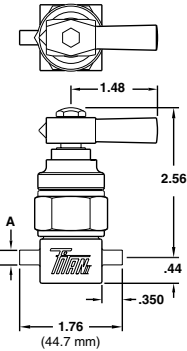



07L - Series:
1/4 Turn Lever Indicator
Positional Handle

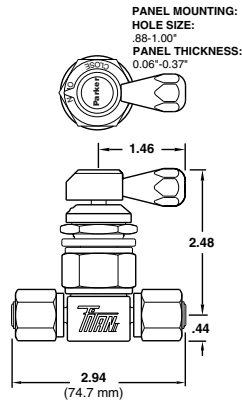

End Connections	Designator	End to End "L" in (mm)	"A" O.D. in (mm)
1/4" Tube Weld	TWTW	1.76 (44.7)	1/4 (6.4)
3/8" Tube Weld	TWTW	1.76 (44.7)	3/8 (9.5)
1/4" VacuSeal Male	VMVM	2.32 (58.9)	-
1/4" VacuSeal Female	VVVF	2.96 (75.2)	-
1/4" VacuSeal Male Swivel Nut	VMSVMS	3.94 (100.1)	-

Dimensions are for reference only.

Flow Curves

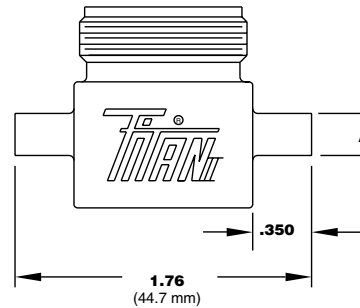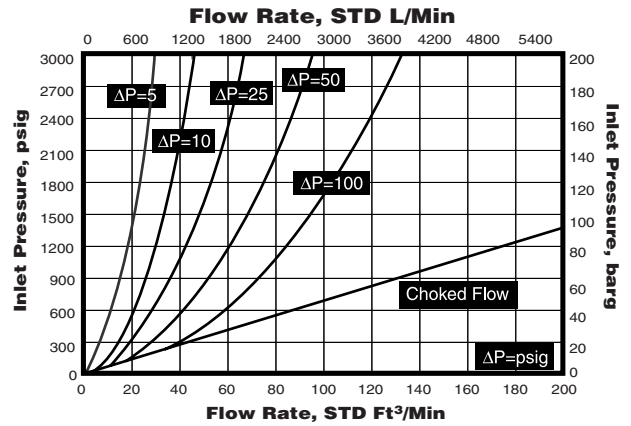

Ordering Information

07- 4 4 2 TW TW- MS

SERIES

- 06 - Series = Round Handle 1/2 turn (Standard)
- 06I - Series = Round Handle 1/4 turn (Optional)
- 07 - Series = Lever Handle 1/4 turn (Standard)
- 07L - Series = Indicating Lever Handle 1/4 turn (Optional)
- 94 - 06 = Pneumatic Actuator 3000 psig

INLET PORT SIZE

- 4 = 1/4"
- 6 = 3/8"

OUTLET PORT SIZE

- 4 = 1/4"
- 6 = 3/8"

MATERIAL

- 2 = 316L Stainless Steel™
- 16 = Hastelloy C-22®
- 31 = Nickel

INLET CONNECTION

- TW = Tube Weld
- VF = VacuSeal™ Female
- VM = VacuSeal™ Male (1/4")
- VMS = VacuSeal™ Male Swivel

Notes: Consult factory for additional Connection options

OPTIONAL FEATURES

- CB1 = Constant Bleed 1 slpm
 - CB3 = Constant Bleed 3 slpm
 - MS = Metal Seat
 - Clear Handle - Standard - Leave Blank
- Note:** Consult factory for additional handle options.

OUTLET CONNECTION

- TW = Tube Weld
- VF = VacuSeal™ Female
- VM = VacuSeal™ Male (1/4")
- VMS = VacuSeal™ Male Swivel

VacuSeal™ is a trademark of Parker Hannifin Corporation.
Elgiloy® is a registered trademark of Elgiloy Corporation.
Hastelloy® is a registered trademark of Haynes International.





Parker Hannifin Corporation's Veriflo Division presents the Quantum 928AOPHP. The 928AOPHP is a poppet-style diaphragm valve for remote control of gases or liquids.

The 928AOPHP serves two functions: it acts as the system inlet valve, and it reduces the system pressure to a safer working range.



features

- ▶ "VeriClean", Veriflo's low sulfur high purity 316L VAR Stainless Steel™ enhances electropolishing, welding and corrosion resistance.
- ▶ Improves system safety by lowering or regulating system pressure to 350 psig.
- ▶ The 928 AOPHP is field-convertible, in place, to a 928 L (lever operated) valve by a simple exchange of non-wetted parts.
- ▶ Fully functional from a vacuum to 3500 psig inlet and outlet.
- ▶ Aerodynamic, smooth flow passages.
- ▶ Minimum particle generation and entrapment.
- ▶ 100% Helium leak tested.
- ▶ A unique patented compression member which loads the seal uniformly without the need for threaded components or crimping operations.
- ▶ "Hurricane" cleaning, optional proprietary cleaning process, removes metallic ions, organic films and surface adhering particles.

materials of construction

Wetted

Body . . . "VeriClean", Veriflo's custom high purity Type 316L VAR Stainless Steel™, Hastelloy C-22®
 Seal PCTFE, optional Vespel®
 Diaphragm Elgiloy® or equivalent
 Poppet 316L Stainless Steel, Hastelloy C-22®
 Compression Member 316L Stainless Steel, Hastelloy C-22®
 Spring Hastelloy C-22®
 Screen Hastelloy C-22®

Non-Wetted

Nut 316L Stainless Steel
 Cap 316L Stainless Steel

Actuator Materials

Actuator Housing Brass, Nickel Plated

operating conditions

Maximum inlet pressure . . . 3500 psig (240 barg)
 For Oxygen 2200 psig (151 barg)
 Minimum operating pressure Vacuum
 Nominal outlet pressure 350 psig (24 barg)
 with 2000 psig (138 barg) inlet pressure and 80 psig (5.5 barg) actuator pressure

Outlet pressure varies with inlet and actuator pressure

Temperature -40°F to 150°F (-40°C to 66°C)
 Bake out 250°F (121°C) in the open position
 Flow capacity $C_v = .04$

functional performance

Design Leak Rate:
 Outboard Less than 1×10^{-9} scc/sec He
 Inboard Less than 2×10^{-10} scc/sec He
 Across seat Less than 4×10^{-9} scc/sec He
 Design Proof Pressure 5,250 psig (362 barg)
 Design Burst Pressure 10,500 psig (724 barg)

standard configurations

Any combination of 1/4" FS male and/or female fittings
 Gland to gland length 2.78 in. (70.6 mm)
 Optional 3.06 in. (77.7 mm)
 1/4 inch tube stubs inlet and outlet
 End to end length 1.75 in. (44.5 mm)
 Other configurations available as options - including as many as five ports

internal volume

1.86 cc (including face seal fittings)

surface finishes

Standard Ra 15-20 micro inch (.38 to .5 micro meter) or less
 Optional Ra EX=10 micro inch (.25 micro meter) or less


approximate weight

1.1 lbs (.49 kg)




QUANTUM 928AOPHP

Dimensional Drawing

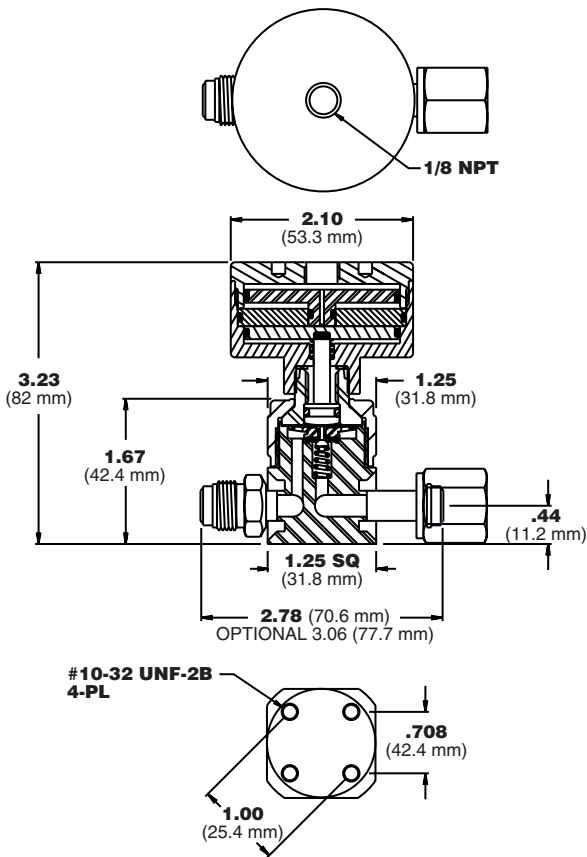

Flow Curve

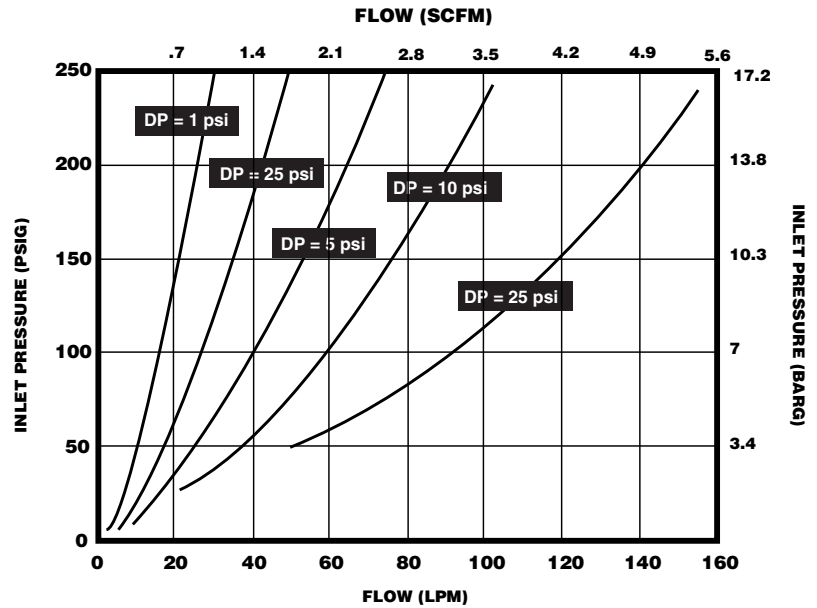

Ordering Information

928 AOPHP S FSMM VESP

BASIC SERIES

928

TYPE

AOPHP = Air Operated High Pressure

MATERIAL

H = Hastelloy C-22®*

S = 316L VAR Stainless Steel

* **Hastelloy C-22® Material Option includes: body, compression member, poppet, spring, and screen.**

** **TH option includes: Hastelloy C-22® compression member, poppet, spring, and screen.**

*** **Recommended for Nitrous Oxide (N₂O) Service.**

† **See Valve Selection Guide for multiple porting selections.**

OPTIONAL FEATURES

TH = Hastelloy C-22® Trim **

VESP = Vespel® Seat***

CONNECTIONS†

FSMM = 1/4" Face Seal, Male in-Male out

FSFF = 1/4" Face Seal, Female in-Female out

FSFM = 1/4" Face Seal, Female in-Male out

FSMF = 1/4" Face Seal, Male in-Female out

TS = 1/4" Tube Stub

P = 1/4" NPTF

Hastelloy C-22® is a registered trademark of Haynes International, Inc.

Kel-F 81® is a registered trademark of 3M Company.

Vespel® is a registered trademark of DuPont Company.

Elgiloy® is a registered trademark of Elgiloy Company.

Viton® is a registered trademark of DuPont Dow Elastomers Company

Parker
Instrumentation

LockOut-TagOut

**Safety
Option**



Parker Hannifin Corporation's Veriflo Division presents the LockOut-TagOut safety option available for its standard diaphragm valve product line.

This design allows for tools or gas lines to be locked out for maintenance activities. This durable metal design can be used with confidence while doing repairs.



► **materials of construction**

Clamp ZA-27 alloy casting
Powder coat (Red)
Nut 303 Stainless Steel
Washer 304 Stainless Steel Annealed
Dowel Pin Stainless Steel 18-8

Note: Refer to individual valve literature sheet for specific product specifications.

- Designed to hold pressures up to 3500 psig (see table below for specific pressures).
- Durable metal design for added safety
- Easy field upgrades to Mini-Lever actuated valves (special tool required PN: 15000333).
- Adaptable to the 944, 945, 930, 955, NV55, and NOVA valves.
- Use with padlock sizes #7(.187" diameter) through #3(.281" diameter).
- Adaptable for panel mount use (.065"-.125")

Product	Maximum Operating Pressure	Maximum Safety Inlet Pressure in Closed & Locked Position
944M LK	3500 PSIG (240 barg)	3500 PSIG (240 barg)
945M LK	3500 PSIG (240 barg)	3500 PSIG (240 barg)
930M LK	250 PSIG (17.2 barg)	250 PSIG (17.2 barg)
955M LK	250 PSIG (17.2 barg)	250 PSIG (17.2 barg)
NV55M LK	250 PSIG (17.2 barg)	250 PSIG (17.2 barg)
NOVAM LK	3500 PSIG (240 barg)	3500 PSIG (240 barg)



LockOut-TagOut

Dimensional Drawing

Valve Type	Dimension A	Dimension B
930M	3.57 (90.7)	2.55 (64.7)
944M	3.80 (96.5)	2.78 (70.6)
945M	3.57 (90.7)	2.55 (64.8)
955M	3.72 (94.5)	2.70 (68.6)
NV55M	3.57 (90.7)	2.55 (64.8)
NOVAM	3.45 (87.6)	2.43 (61.7)


Ordering Information

Refer to each individual basic series valve type literature sheet for proper ordering information.

LockOut-TagOut

BASIC SERIES

944M LK
 945M LK
 930M LK
 955M LK
 NV55MLK
 NOVAMLK

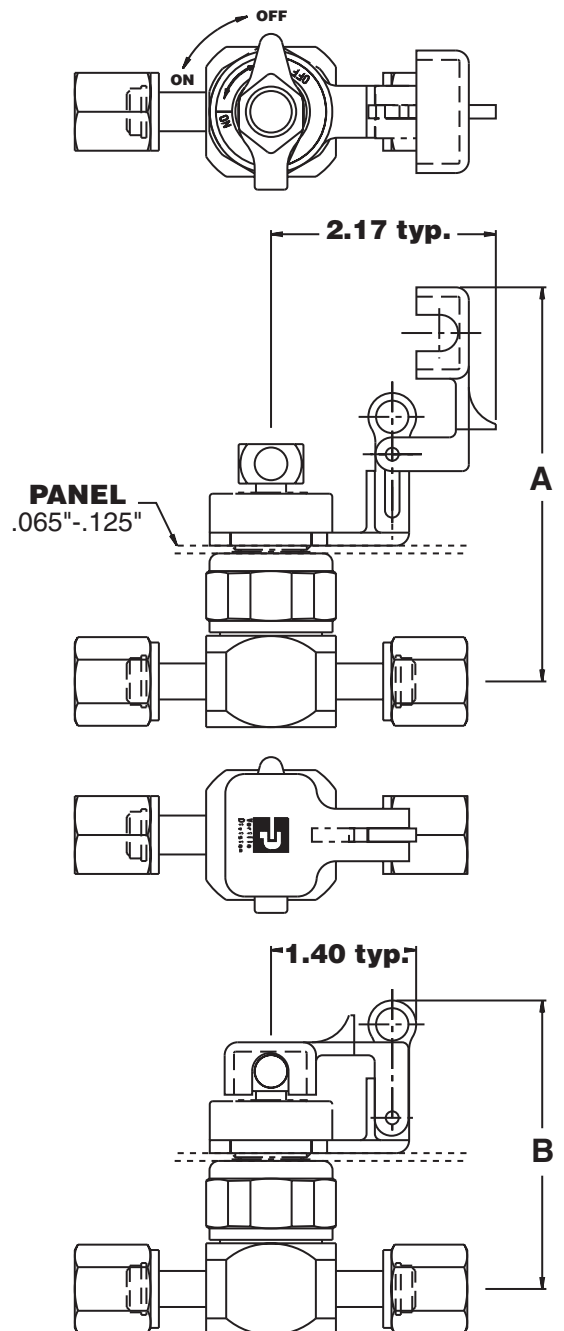



Parker Hannifin Corporation's Veriflo Division presents the VAC100 vacuum generator which has been designed to be used in conjunction with purge systems.



features

- ▶ The vacuum generated is a function of the pressure of the purge gas which flows through the generator.
- ▶ Vacuum generator will improve the effectiveness of cycle purging.
- ▶ The VAC100 will increase the efficiency of the dilution process in purge systems, when the vacuum port of the VAC100 is connected to the outlet of the vent valve.

▶ materials of construction

Wetted

Body	316L Stainless Steel
Venturi	316L Stainless Steel
Nozzle	316L Stainless Steel

▶ operating conditions

Temperature	-40°F to 200°F (-40°C to 95°C)
-------------------	-----------------------------------

▶ standard configurations


1/8" NPT (2 male NPT and 1 female NPT)
1/4" FS male and/or female fittings

▶ approximate weight


2.0 oz (.03 kg)

VAC100

Dimensional Drawing

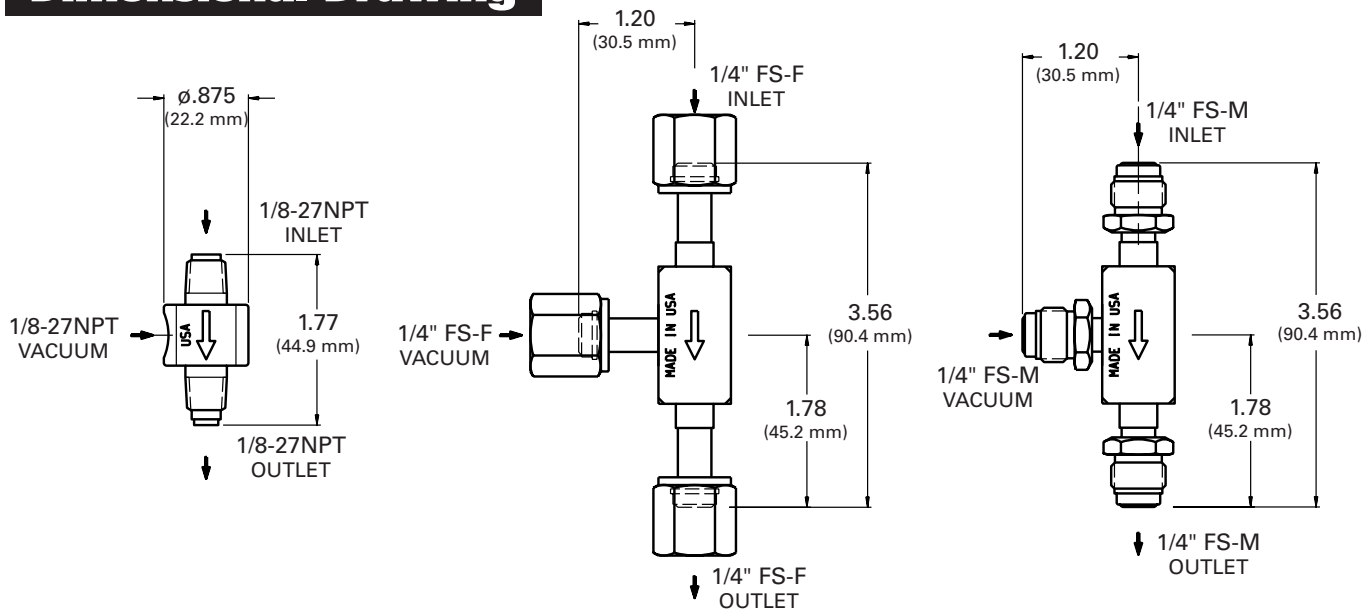


Flow Curves

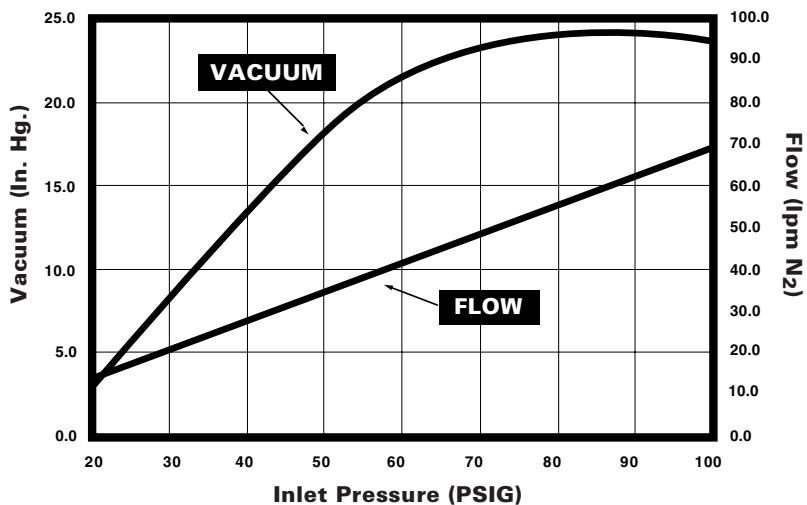

TYPICAL VALUES

Pressure	Flow	Vacuum
40 psig (2.7 barg)	30 SLPM	13 in. Hg. (330 mm Hg)
60 psig (4.1 barg)	40 SLPM	21 in. Hg. (533 mm Hg)
80 psig (5.5 barg)	55 SLPM	24 in. Hg. (635 mm Hg)

Ordering Information

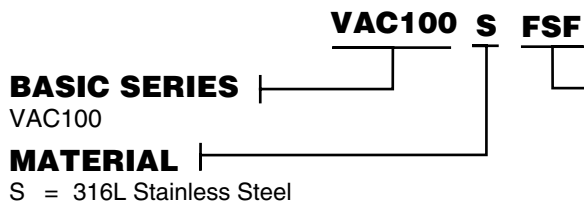

CONNECTIONS
 2 = 1/8" NPTM
 FSF = 1/4" Face Seal Female
 FSM = 1/4" Face Seal Male



Parker Hannifin Corporation
 6035 Parkland Blvd.
 Cleveland, Ohio 44124-4141
 Telephone: (216) 896-3000
 Fax: (216) 896-4000
 www.parker.com

Parker Hannifin Corporation

About Parker Hannifin Corporation

Parker Hannifin is a leading global motion-control company dedicated to delivering premier customer service. A Fortune 500 corporation listed on the New York Stock Exchange (PH), our components and systems comprise over 1,400 product lines that control motion in some 1,000 industrial and aerospace markets. Parker is the only manufacturer to offer its customers a choice of hydraulic, pneumatic, and electromechanical motion-control solutions. Our Company has the largest distribution network in its field, with over 7,500 distributors serving nearly 400,000 customers worldwide.


Parker's Charter

To be a leading worldwide manufacturer of components and systems for the builders and users of durable goods. More specifically, we will design, market and manufacture products controlling motion, flow and pressure. We will achieve profitable growth through premier customer service.

Product Information

North American customers seeking product information, the location of a nearby distributor, or repair services will receive prompt attention by calling the Parker Product Information Center at our toll-free number: 1-800-C-PARKER (1-800-272-7537). In Europe, call 00800-C-PARKER-H (00800-2727-5374).

The Aerospace Group is a leader in the development, design, manufacture and servicing of control systems and components for aerospace and related high-technology markets, while achieving growth through premier customer service.

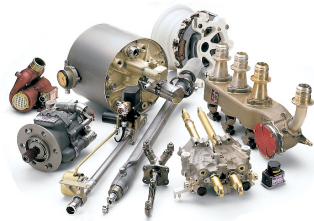

The Climate & Industrial Controls Group designs, manufactures and markets system-control and fluid-handling components and systems to refrigeration, air-conditioning and industrial customers worldwide.



The Fluid Connectors Group designs, manufactures and markets rigid and flexible connectors, and associated products used in pneumatic and fluid systems.



The Seal Group designs, manufactures and distributes industrial and commercial sealing devices and related products by providing superior quality and total customer satisfaction.



The Hydraulics Group designs, produces and markets a full spectrum of hydraulic components and systems to builders and users of industrial and mobile machinery and equipment.



The Filtration Group designs, manufactures and markets quality filtration and clarification products, providing customers with the best value, quality, technical support, and global availability.



The Automation Group is a leading supplier of pneumatic and electromechanical components and systems to automation customers worldwide.



The Instrumentation Group is a global leader in the design, manufacture and distribution of high-quality critical flow components for worldwide process instrumentation, ultra-high-purity, medical and analytical applications.





Parker Hannifin Corporation
Veriflo Division
250 Canal Boulevard
Richmond, CA 94804-0034
Telephone 510.235.9590
Fax 510.232.7396
Web site: <http://www.veriflo.com>

Catalog: 4505
LitPN: 25000179
Revision: A • 10/03

